

Industrial Cameras

STC/FS Series



Make It Faster, Make It Simpler

OMRON has been developing high speed & high performance image processing systems in order to meet the needs of the automation world pursues. And now, image processing began to spread all over the world and the evolution speed of people want is getting higher. For our customers' satisfaction, we start to deliver OMRON SENTECH (former SENTECH)'s cameras. OMRON SENTECH is a manufacturer specializing in industrial cameras that became a new member of the OMRON group. Those cameras make the conventional systems simpler, faster and more flexible. Also they make it easy to assist the visual inspection to capture enlarged images without pc.



Notes for Purchase

- Please contact the trading company for delivery date.
- All cameras in this catalog can not be connected to the image processing system such as FH / FZ / FJ series.

Dimensions

- This catalog contains the dimensions of a typical model. Please confirm the CAD data for the dimensions of models not mentioned.

How to Choose a camera Camera Line-up Chart		Per-interface comparison table Camera Line-up Chart Pages 3 - 4	How to Choose a camera
GigE Vision		CMOS M Series Pages 5 - 6 CMOS S Series Pages 7 - 8 Line Scan Camera Pages 9 - 10	GigE
USB3.0		USB3.0 Pages 11 - 14 USB3.0 Remote Head Pages 15 - 16	USB3.0
CoaXPress		CoaXPress Pages 17 - 18	CoaXPress
Opt-C:Link		Opt-C:Link Pages 19 - 20	Opt-C:Link
Camera Link		CMOS Pages 21 - 24 Remote Head Pages 25 - 26 Line Scan Camera Pages 27 - 28	Camera Link
HDMI/DVI/SDI		4K HDMI Pages 29 - 30 DVI Pages 31 - 32 HD-SDI Pages 33 - 34	HDMI/DVI/SDI
Analog Progressive		Analog Progressive Pages 35 - 36	Analog Progressive
Color TV Format		S133N-B Series Pages 37 - 38	Color TV Format
Small Board Camera		S133N(P)/S133UVC/S133MIP Series Pages 39 - 46	Small Board Camera
Accessories		Cable, Others Pages 47 - 49 Fixed Focus Lens Page 50 4ch USB Board Page 51 Spectral Sensitivity Characteristics Pages 52 - 61	Accessories

How to Choose a Camera

Camera Line-up Chart



How to Choose an Image Sensor

- ☐ Monochrome
 - Mono or Color?
- ☐ Number of Pixels
 - Optimal Resolution for Your Application
- ☐ Scan Speed
 - Required FPS
- ☐ Sensor Size?

How to Choose the Interface

- ☐ Connect to
 - Monitor or PC?
- ☐ Cable Length
 - Distance Between the Camera and the Equipment
- ☐ The Number of Cameras
 - How many cameras for one PC?

Based on factors such as decided specifications, system outline and cost image, refer to the following per-interface comparison table and product lineup chart to choose the optimum Sentech camera.


Interface when using a PC / Interface when not using a PC / Interface not offered by OMRON

Interfaces	GigE Vision®	USB		CoaXpress	Opt-C:Link	Camera Link		Analog	HD-DVI	HD-SDI	TV Formats	IEEE1394b	Camera Link HS
		USB2.0	USB3.0			Base	Full						
Monitor Display	PC Required								Can be connected directly to monitor				
Connection Port	Gigabit Ethernet Port	USB2.0 Port	USB3.0 Port	CoaXpress Grabber Board	Opt-C:Link Grabber Board	Camera Link Frame Grabber Board		Analog Frame Grabber Board	HDMI Port DVI Port	SDI connector	RCA connector BNC connector	Required	Camera Link HS Grabber Board
Cable	Ethernet cable Cat 5e or higher	USB2.0 Cable	USB3.0 Cable	Coaxial Cable	Optical cable	Camera Link Cable		12-pin Cable	HDMI/DVI Cable	Coaxial Cable for SDI	Coaxial Cable	IEEE1394b Cable	Camera Link HS Cable
Max. Cable Length	100 m	5 m	3 m	25 m	150 m	Approx. 5 m to 12 m		100 m	5 m	100 m	100 m	100 m	15 m
Image Transmission Capacity	☆☆	☆	☆☆☆	☆☆☆☆☆	☆☆☆☆☆	☆☆	☆☆☆☆	☆☆	☆☆	☆☆	☆	☆☆	☆☆
Max. Transmission Speed	122 fps 30 Megapixel - 15 fps 500 Megapixel (1,000Mbps)	90 fps 30 Megapixel - 15 fps 200 Megapixel (480Mbps)	123 fps 30 Megapixel - 14 fps 500 Megapixel (5,000Mbps)	25 Gbps	12.5 Gbps/ 40 Gbps	240 fps 30 Megapixel - 16 fps 500 Megapixel (2,380Mbps)	600 fps 30 Megapixel - 60 fps 1200 Megapixel (7,140Mbps)	90 fps 30 Megapixel - 15 fps 200 Megapixel	60 fps 1080 p	60 fps 1080 p	59.94 fps 30 Megapixel (interlaced)	800 Mbps	2,100 Mbps
Power over Cable	○(PoE Model)	○(All Models)		○	Separate Power Supply	○(PoCL Model)		Separate Power Supply	Separate Power Supply	Separate Power Supply	Separate Power Supply	○	○
Software Provider	Camera Manufacturer	Camera Manufacturer		Board Manufacturer	Board Manufacturer	Board Manufacturer		Board Manufacturer	Not required			Camera Manufacturer	Board Manufacturer
System Cost	Low	Low		High	High	High		High	Low	Mid	Low	Low	High
Multiple Device Connection	Add Ethernet card or use switching hub	Add USB port expansion card (hub not recommended)		Add frame grabber board	Add frame grabber board	Add frame grabber board		Add frame grabber board	Use switcher			IEEE1394b expansion card, use hub	Add frame grabber board
Advantages	- Long cable length - Cheap cost to connect multiple cameras - Frame grabber not required	- Easy to connect - Low cost - Cheap cost to connect multiple cameras		- Long cable length - High transmission capacity	- Long cable length - Strong to noise	- Proven track record - High transmission capacity		- Proven track record - Long cable length	- Can easily be connected directly to monitor	- Long cable length	- Proven track record - Low cost - Long cable length	- Proven track record	- High transmission capacity - Smaller connector compared with Camera Link
Disadvantages	- Lower fps comparing with other interfaces	- Short cable length		- No extensive track record - High board cost	- No extensive track record - Few compatible board	- Short cable length - High board and cable cost - High cost to connect multiple cameras		- High board and cable cost	- Short cable length - No trigger function	- Few SDI-compatible monitors	- Low resolution	- Short cable length - IEEE1394b card required	- High board and cable cost
Main Applications	- Image processing - Monitoring	- Image processing - Monitoring		- Image processing - Monitoring	- Image processing - Monitoring	- Image processing		- Image processing	- Monitoring		- Image processing - Monitoring	- Image processing	- Image processing

* System costs, advantages and disadvantages are subjective opinions by OMRON

Camera Line-up Chart

The horizontal indicates pixels and the vertical indicates frame rates

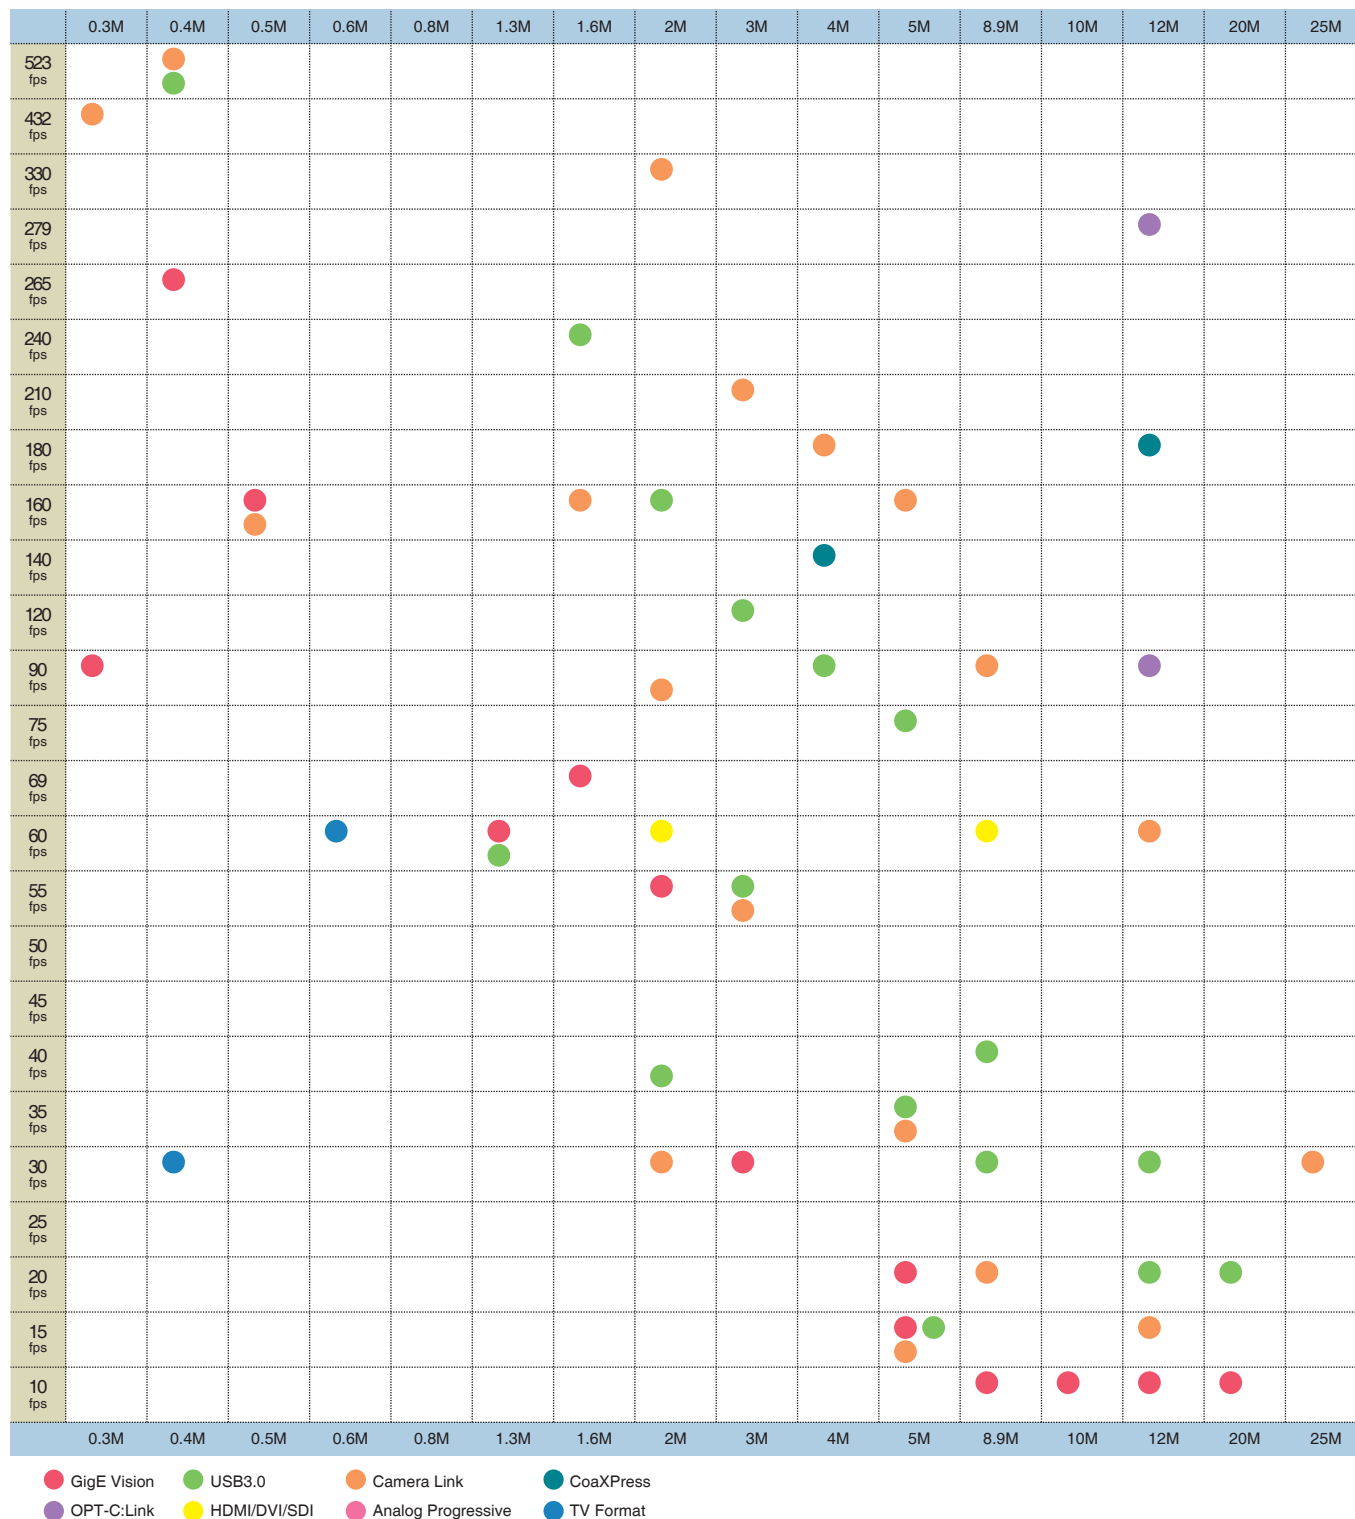

GigE Vision Small CMOS Camera M Series

GigE



Description

PoE-compatible GigE Vision camera with high-resolution, high-speed CMOS sensor

Features

More compact body

Case comes in two sizes: 29 × 29 mm and 30 × 40 mm

Product Line-up

Global shutter models

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MBS43POE	Monochrome	0.4M	282.8 fps	720 × 540	1/2.9	6.9 × 6.9	IMX287	C
STC-MCS43POE	Color							
STC-MBS52POE	Monochrome	0.5M	166.5 fps	816 × 624	1/1.7	9 × 9	IMX433	C
STC-MCS52POE	Color							
STC-MBE132POE	Monochrome	1.3M	61 fps	1280 × 1024	1/1.8	5.3 × 5.3	EV76C560	C
STC-MCE132POE	Color							
STC-MBS163POE	Monochrome	1.6M	70.7 fps	1440 × 1088	1/2.9	3.45 × 3.45	IMX273	C
STC-MCS163POE	Color							
STC-MBS202POE	Monochrome	2M	54.6 fps	1624 × 1240	1/1.7	4.5 × 4.5	IMX430	C
STC-MCS202POE	Color							
STC-MBS231POE	Monochrome	2.3M	41.6 fps	1920 × 1200	1/1.2	5.86 × 5.86	IMX249	C
STC-MCS231POE	Color							
STC-MBS312POE	Monochrome	3.2M	34.9 fps	2048 × 2048	2/3	3.45 × 3.45	IMX265	C
STC-MCS312POE	Color							
STC-MBS500POE	Monochrome	5M	21.9 fps	2448 × 2048	2/3	3.45 × 3.45	IMX264	C
STC-MCS500POE	Color							
STC-MBS881POE	Monochrome	8.9M	12.4 fps	4096 × 2160	1	3.45 × 3.45	IMX267	C
STC-MCS881POE	Color							
STC-MBS122BPOE	Monochrome	12.3M	8.9 fps	4096 × 3000	1.1	3.45 × 3.45	IMX255	C
STC-MCS122BPOE	Color							

Rolling shutter models

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MBA503POE	Monochrome	5M	14 fps	2592 × 1944	1/2.5	2.2 × 2.2	MT9P031	C
STC-MCA503POE	Color							
STC-MBS642POE	Monochrome	6.4M	17.4 fps	3072 × 2048	1/1.8	2.4 × 2.4	IMX178	C
STC-MCS642POE	Color							
STC-MBA1002POE	Monochrome	10M	10.3 fps	3856 × 2764	1/2.3	1.67 × 1.67	MT9J003	C
STC-MBS1242POE	Monochrome	12M	9.2 fps	4000 × 3000	1/1.7	1.85 × 1.85	IMX226	C
STC-MCS1242POE	Color							
STC-MBS2041POE	Monochrome	20.4M	5.5 fps	5472 × 3648	1	2.4 × 2.4	IMX183	C
STC-MCS2041POE	Color							

Accessories

Screw-Fastened GigE Cables

Model	Length
FJ-VSG 3M	3 m
FJ-VSG 5M	5 m
FJ-VSG 10M	10 m
FJ-VSG 20M	20 m
FJ-VSG 40M	40 m

Power Supply and I/O Cables

Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m

Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.


Conversion Cables		
Model	Applicable Model	General Specifications
CAB-KWA-IEA		Converts 6-pin connector to S Series pin assignment

Tripod		
Model	Applicable Model	General Specifications
TP-KWA	GigE Vision M Series	
TP-KWA-IEA	GigE Vision M Series	Used to set M Series with sensor center at same height as that of S Series
TP-KWA2	STC-MBS/MCS881POE, STC-MBS/MCS122BPOE	


Drawing dimension

Monochrome

STC-MBS43POE
STC-MBS163POE
STC-MBS312POE
STC-MBS500POE

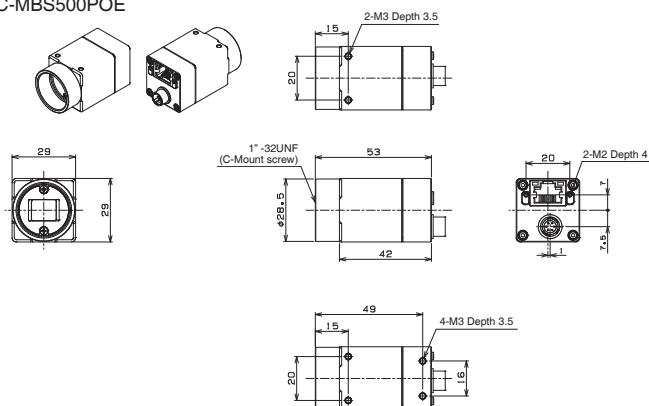


STC-MBS881POE
STC-MBS122BPOE

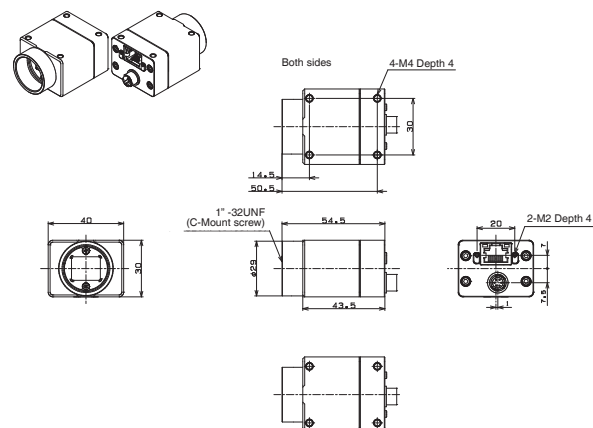


Color

STC-MCS43POE
STC-MCS163POE
STC-MCS312POE
STC-MCS500POE

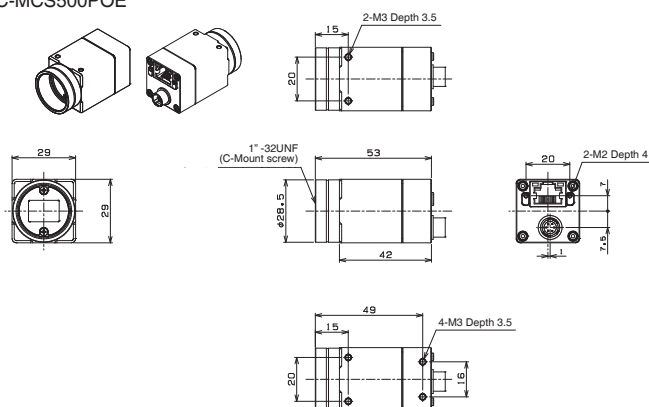

STC-MCS881POE
STC-MCS122BPOE

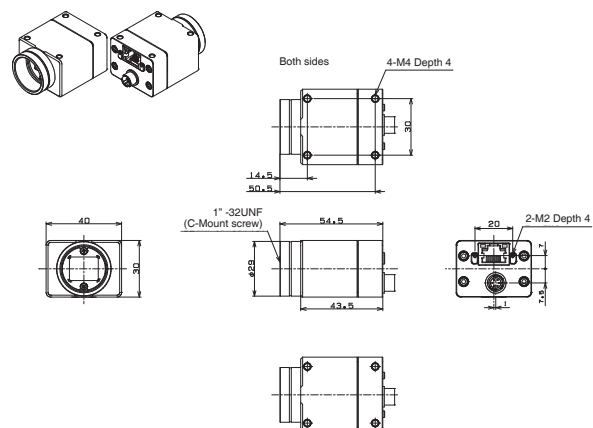

GigE Vision CMOS Camera S Series

GigE



Description

PoE-compatible GigE Vision camera with high-resolution, high-speed CMOS sensor

Features

Sony CMOS [Pregius] adopted cameras are also available
Supports both PoE (Power over Ethernet) and external power source (auto-switch)

Compact, durable case designed for easy mounting

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-SBS43POE	Monochrome	0.4M	265 fps	728 × 544	1/2.9	6.9 × 6.9	IMX287	C	
STC-SCS43POE	Color								
STC-SBE132POE	Monochrome	1.3M	61 fps	1280 × 1024	1/1.8	5.3 × 5.3	EV76C560	C	
STC-SCE132POE	Color								
STC-SBS163POE	Monochrome	1.6M	69 fps	1456 × 1088	1/2.9	3.45 × 3.45	IMX273	C	
STC-SCS163POE	Color								
STC-CMB2MPOE	Monochrome	2M	50 fps	2024 × 1088	2/3	5.5 × 5.5	CMV2000	C	
STC-CMC2MPOE	Color								
STC-CMB2MPOE-IR	NIR								
STC-SBS231POE	Monochrome	2.3M	41.6 fps	1920 × 1200	1/1.2	5.86 × 5.86	IMX249	C	
STC-SCS231POE	Color								
STC-SBS312POE	Monochrome	3.2M	33.4 fps	2048 × 1536	1/1.8	3.45 × 3.45	IMX265	C	
STC-SCS312POE	Color								
STC-CMB4MPOE	Monochrome	4M	25 fps	2048 × 2048	1	5.5 × 5.5	CMV4000	C	
STC-CMC4MPOE	Color								
STC-CMB4MPOE-IR	NIR								
STC-SBS500POE	Monochrome	5M	21 fps	2448 × 2048	2/3	3.45 × 3.45	IMX264	C	
STC-SCS500POE	Color								
STC-SBA503POE	Monochrome	5M	14 fps	2592 × 1944	1/2.5	2.2 × 2.2	MT9P031	C	Rolling shutter
STC-SCA503POE	Color								
STC-SCS853POE	Color	8M	12.7 fps	3840 × 2160	1/2.5	1.62 × 1.62	IMX274	C	Rolling shutter
STC-SBS1242POE	Monochrome	12M	8.7 fps	4000 × 3000	1/1.7	1.85 × 1.85	IMX226	C	Rolling shutter
STC-SCS1242POE	Color								

Note. You are recommended to use the GigE Vision M Series because the S Series will be discontinued.


Accessories

Screw-Fastened GigE Cables	
Model	Length
FJ-VSG 3M	3 m
FJ-VSG 5M	5 m
FJ-VSG 10M	10 m
FJ-VSG 20M	20 m
FJ-VSG 40M	40 m

Power Supply and I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m

Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension

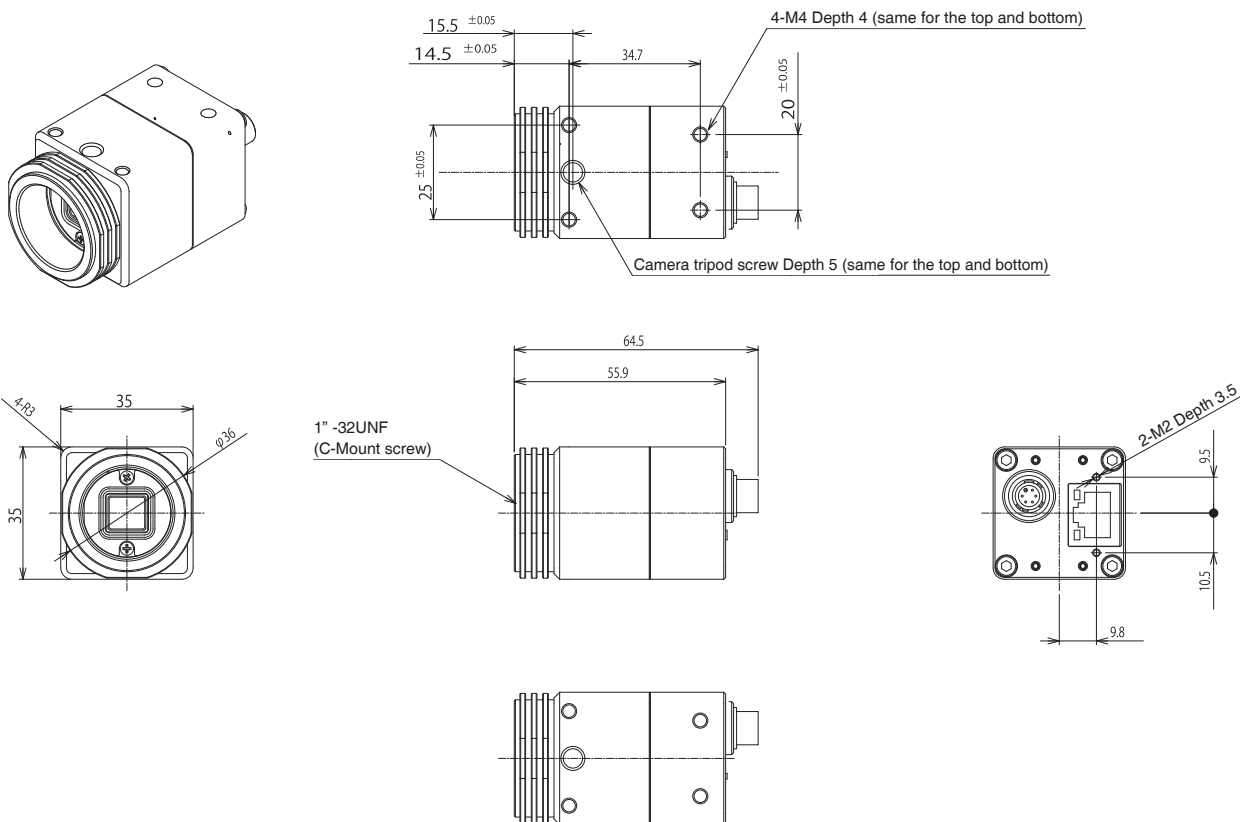

Note. Drawings are differed by model. Please confirm the CAD data of each model.

GigE Vision CMOS Line Scan Camera

GigE



Description

PoE-compatible GigE Vision line sensor camera

Features

Compact case designed for easy mounting

Offered in 2K, 4K, or 8K

Product Line-up

Model	Monochrome/Color	Resolution	Line Rate	Pixel size	Sensor	Sensor Type	Lens Mount
FS-B2KU7GES-C	Monochrome	2048 × 1	51 kHz	7 μm	DR-2K-7	Single	C
FS-B2KU7GES-F							F
FS-B2KU7GES-M42							M42
FS-B4KU7GES-F		4096 × 1	26 kHz	7 μm	DR-4K-7	Single	F
FS-B4KU7GES-M42							M42
FS-B4KU35GES-C		4096 × 1	26 kHz	3.5 μm	DR-4K-3.5	Single	C
FS-B4KU35GES-F							F
FS-B4KU35GES-M42							M42
FS-B8KU35GES-F		8192 × 1	13 kHz	3.5 μm	DR-8K-3.5	Single	F
FS-B8KU35GES-M42							M42

Accessories






Screw-Fastened GigE Cables	
Model	Length
FJ-VSG 3M	3 m
FJ-VSG 5M	5 m
FJ-VSG 10M	10 m
FJ-VSG 20M	20 m
FJ-VSG 40M	40 m

Power Supply and I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m






Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension






C Mount

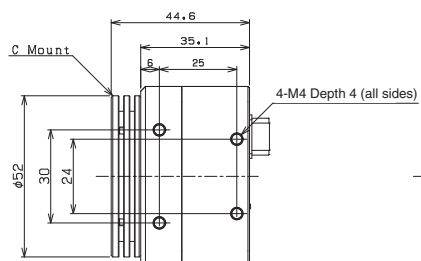

F Mount

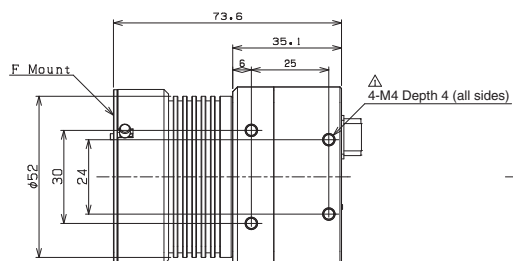

M42 Mount

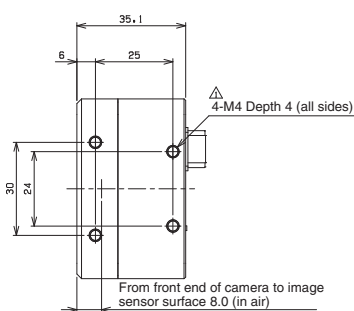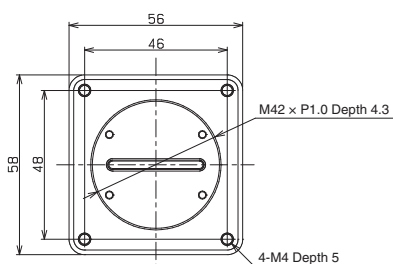

USB3.0 Camera

USB3.0



Description

USB3.0 Compact CMOS Camera

Features

Offered in resolutions ranging from 0.4M to 20.4M
Compact, durable case designed for easy mounting

Product Line-up

Global shutter models								
Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MBS43U3V	Monochrome	0.4M	527.1 fps	720 × 540	1/2.9	6.9 × 6.9	IMX287	C
STC-MCS43U3V	Color							
STC-MBE132U3V	Monochrome	1.3M	60 fps	1280 × 1024	1/1.8	5.3 × 5.3	EV76C560	CS
STC-MCE132U3V	Color							
STC-MBS163U3V	Monochrome	1.6M	238 fps	1440 × 1080	1/2.9	3.45 × 3.45	IMX273	C
STC-MCS163U3V	Color							
STC-MBCM200U3V	Monochrome	2M	167 fps	2048 × 1088	2/3	5.5 × 5.5	CMV2000	C
STC-MBCM200U3V-NIR	Monochrome NIR							
STC-MBS231U3V	Monochrome	2.3M	41.6 fps	1920 × 1200	1/1.2	5.86 × 5.86	IMX249	C
STC-MCS231U3V	Color							
STC-MBS241U3V	Monochrome	2.3M	163 fps	1920 × 1200	1/1.2	5.86 × 5.86	IMX174	C
STC-MCS241U3V	Color							
STC-MBS312U3V	Monochrome	3.2M	56 fps	2048 × 1536	1/1.8	3.45 × 3.45	IMX265	C
STC-MCS312U3V	Color							
STC-MBS312U3V-SE	Monochrome							
STC-MCS312U3V-SE	Color							
STC-MBS322U3V	Monochrome	3.2M	121 fps	2048 × 1536	1/1.8	3.45 × 3.45	IMX252	C
STC-MCS322U3V	Color							
STC-MBS322U3V-SE	Monochrome							
STC-MCS322U3V-SE	Color							
STC-MBCM401U3V	Monochrome	4M	89 fps	2048 × 2048	1	5.5 × 5.5	CMV4000	C
STC-MCCM401U3V	Color							
STC-MBCM401U3V-NIR	Monochrome NIR							
STC-MBS500U3V	Monochrome	5M	35.8 fps	2448 × 2048	2/3	3.45 × 3.45	IMX264	C
STC-MCS500U3V	Color							
STC-MBS500U3V-SE	Monochrome							
STC-MCS500U3V-SE	Color							
STC-MBS510U3V	Monochrome	5M	75.7 fps	2448 × 2048	2/3	3.45 × 3.45	IMX250	C
STC-MCS510U3V	Color							
STC-MBS510U3V-SE	Monochrome							
STC-MCS510U3V-SE	Color							
STC-MBS70BU3V	Monochrome	7.1M	51.2 fps	3216 × 2208	1.1	4.5 × 4.5	IMX428	C
STC-MCS70BU3V	Color							
STC-MBS881U3V	Monochrome	8.9M	32.5 fps	4096 × 2160	1	3.45 × 3.45	IMX267	C
STC-MCS881U3V	Color							

Go to the next page

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MBS891U3V	Monochrome	8.9M	41.9 fps	4096 × 2160	1	3.45 × 3.45	IMX255	C
STC-MCS891U3V	Color							
STC-MBS122BU3V	Monochrome	12.3M	23.5 fps	4096 × 3000	1.1	3.45 × 3.45	IMX304	C
STC-MCS122BU3V	Color							
STC-MBS123BU3V	Monochrome	12.3M	30.4 fps	4096 × 3000	1.1	3.45 × 3.45	IMX253	C
STC-MCS123BU3V	Color							

Note. We recommend that you use an external power supply for 8.9M and 12M cameras, for depending on PC performance, power supplied via USB bus connection alone may not be sufficient for these cameras.
Note. Models with "-SE" have been additionally equipped with the Short Exposure Mode feature.

Rolling shutter models								
Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MBS1242U3V	Monochrome	12M	31.2 fps	4000 × 3000	1/1.7	1.85 × 1.85	IMX226	C
STC-MCS1242U3V	Color							
STC-MBS2041U3V	Monochrome	20.4M	18.5 fps	5472 × 3648	1	2.4 × 2.4	IMX183	C
STC-MCS2041U3V	Color							

Non-USB3 Vision Compliant Models (with Rolling Shutters)								
Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MBA5MUSB3	Monochrome	5M	14 fps	2592 × 1944	1/2.5	2.2 × 2.2	MT9P031	CS
STC-MCA5MUSB3	Color							

USB3.0

Accessories

USB 3.0 Cables (USB 3.0 Micro-B, with Camera-Side Fastening Screws)		
Model	Length	Cable Type
CAB-USB3-02	2 m	Normal
CAB-USB3-03	3.5 m	
CAB-USB3-05	5 m	
CAB-USB3-07	7 m	
CAB-USB3-10	10 m	Normal high-transmission cables
CAB-USB3-02-RB	2 m	Robot cables
CAB-USB3-03-RB	3.5 m	
CAB-USB3-05-RB	5 m	
CAB-USB3-07-RB	7 m	

Note. Please make sure in advance that USB 3.0 cables operate correctly under your environment.

Mount Conversion Adapter	
Model	Applicable Model
CS-C-R	CS Mount Series

Tripod Mount	
Model	Applicable Model
TP-HCA *	STC-MCE/MBE132U3V, STC-MCA/MBA5MUSB3
TP-JVA	0.4M, 1.6M, 2M, 2.3M, 3.2M, 4M, 5M (M*S500/510U3V)
TP-JQA	7.1M, 8.9M, 12.3M, 20.4M






* The tripod mount is screwed at two points on the lens side.

I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m






Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension







STC-MBE/MCE132U3V
STC-MBA/MCA5MUSB3

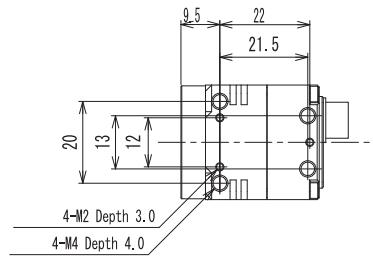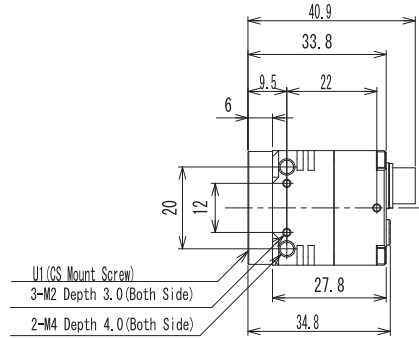

STC-MBS/MCS43U3V
STC-MBS/MCS163U3V
STC-MBCM200U3V(-NIR)
STC-MBCM/MCCM401U3V(-NIR)
STC-MBS/MCS241U3V
STC-MBS/MCS231U3V
STC-MBS/MCS312U3V(-SE)
STC-MBS/MCS322U3V(-SE)
STC-MBS/MCS500U3V(-SE)
STC-MBS/MCS510U3V(-SE)

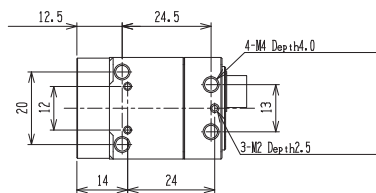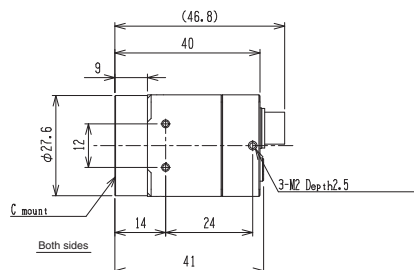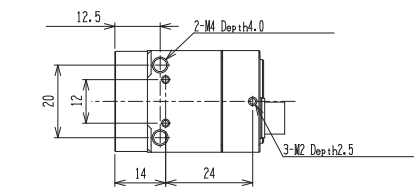

STC-MBS/MCS70BU3V
 STC-MBS/MCS881U3V
 STC-MBS/MCS891U3V
 STC-MBS/MCS122BU3V
 STC-MBS/MCS123BU3V
 STC-MBS/MCS2041U3V



USB3.0 Remote Head Camera

USB3.0



Description

Ultra-compact USB3 Vision remote head camera

Features

Separate sensor head for installation in previously difficult locations. Robust cable ideal for moving parts

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-RBS163U3V-UM121	Monochrome	1.6M	238 fps	1440 × 1080	1/2.9	3.45 × 3.45	IMX273	S	Cable from top, cable length: 1 m
STC-RCS163U3V-UM121	Color								
STC-RBS163U3V-SM121	Monochrome								Cable from top, cable length: 1 m
STC-RCS163U3V-SM121	Color								
STC-RBS163U3V-UM12	Monochrome								Cable from top, cable length: 2.5 m
STC-RCS163U3V-UM12	Color								
STC-RBS163U3V-SM12	Monochrome								Cable from rear, cable length: 2.5 m
STC-RCS163U3V-SM12	Color								

I/O Cables

Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m

Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

CoaXPress Camera



Description

High Speed CMOS CoaXPress Camera

Features

4M, 12M

Compact case makes CoaXPress an ideal replacement for Camera Link cameras

PoCXP compliant

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-CMB401CXP	Monochrome	4M	142.5 fps	2048 × 2048	1	5.5 × 5.5	CMV4000	C	CXP3 or 6 × 1 Lane
STC-CMC401CXP	Color								
STC-CMB120ACXP	Monochrome	12M	186.9 fps	4096 × 3072	1.76	5.5 × 5.5	CMV12000	M42	CXP6 × 4, 2, 1 Lane Cable from rear
STC-CMC120ACXP	Color								CXP6 × 4, 2, 1 Lane Cable from top
STC-CMB120ACXP-T	Monochrome								CXP6 × 4, 2, 1 Lane Cable from top
STC-CMC120ACXP-T	Color								CXP6 × 4, 2, 1 Lane Cable from top
STC-CMB120ACXP-F	Monochrome							F	CXP6 × 4, 2, 1 Lane Cable from rear
STC-CMC120ACXP-F	Color								CXP6 × 4, 2, 1 Lane Cable from rear
STC-CMB120ACXP-T-F	Monochrome								CXP6 × 4, 2, 1 Lane Cable from top
STC-CMC120ACXP-T-F	Color								CXP6 × 4, 2, 1 Lane Cable from top

Accessories


Mount Conversion Adapter		
Model	Applicable Model	General Specifications
M42-F-R	12M Model	M42 P=1 FB=10 mm → F mount Conversion Adapter

I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m


Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension


STC-CMB/CMC120ACXP-T
STC-CMB/CMC120ACXP-T-F

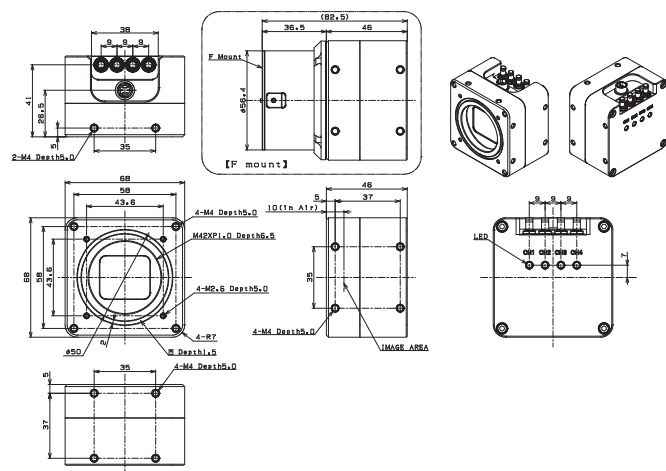

STC-CMB/CMC120ACXP
STC-CMB120ACXP-F/CMC120ACXP-F

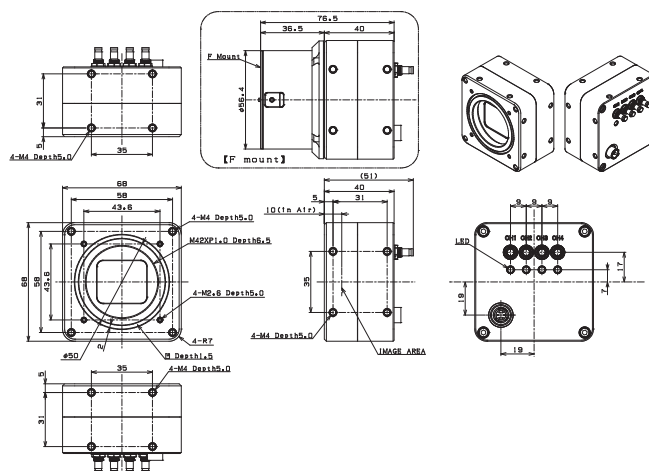

STC-CMB/CMC401CXP

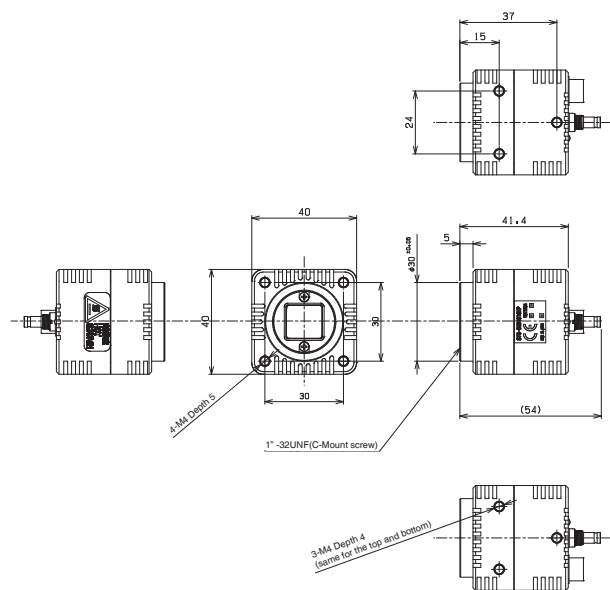

Opt-C:Link Camera



Description

High Speed Opt-C: Link

Features

Video capture resolution of 12MP@279 fps (40 Gbps models)

Fiber-optic cable allows for noise resistance and longer cable distance

Can be used in moving parts by connecting with commercially available flexible cables

Opt-C:Link

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H x V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-CMB120AOPT-F	Monochrome	12M	93.4 fps	4096 × 3072	1.76	5.5 × 5.5	CMV12000	F	External power supply, SFP+optical connector × 2
STC-CMC120AOPT-F	Color								
STC-CMB120AOPQ	Monochrome	12M	279 fps	4096 × 3072	1.76	5.5 × 5.5	CMV12000	M42	External power supply, QSFP+optical connector × 1 40 Gbps
STC-CMC120AOPQ	Color								
STC-CMB120AOPQ-F	Monochrome	12M	279 fps	4096 × 3072	1.76	5.5 × 5.5	CMV12000	F	External power supply, QSFP+optical connector × 1 40 Gbps
STC-CMC120AOPQ-F	Color								

Accessories

Mount Conversion Adapter

Model	Applicable Model	General Specifications
M42-F-R	12M	M42 P=1 FB=10 mm → F mount Conversion Adapter


Power Supply and I/O Cables

Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m


Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension

STC-CMB/CMC120AOPT-F

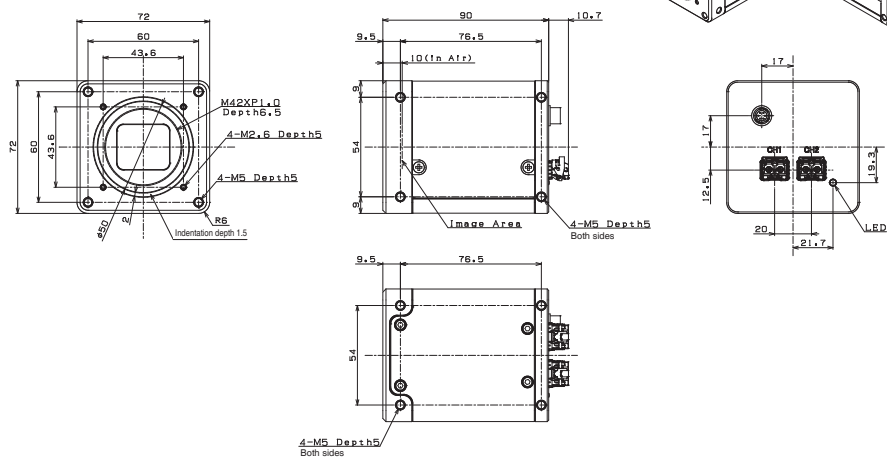

STC-CMB(C)120AOPQ

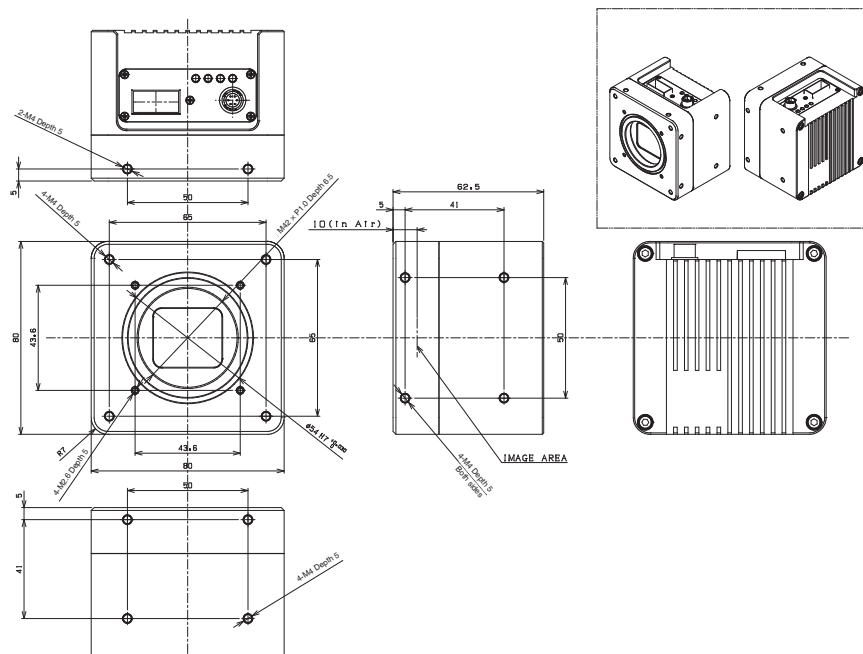

Camera Link CMOS Camera



Description

High Speed CMOS Camera Link Series

Features

0.5M, 2M, and high-resolution 25M models newly added to product lineup

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-CMB33PCL	Monochrome	VGA	432 fps	642 × 484	1/3	7.4 × 7.4	CMV300	C	PoCL, automatically switched, SDR connector × 2
STC-CMC33PCL	Color								
STC-SPB43PCL	Monochrome	0.4M	523.6 fps	720 × 540	1/2.9	6.9 × 6.9	IMX287	C	PoCL, automatically switched, SDR connector × 1
STC-SPC43PCL	Color								
STC-SPB52PCL	Monochrome	0.5M	166.5 fps	810 × 620	1/1.7	9 × 9	IMX433	C	PoCL, automatically switched, SDR connector × 2
STC-SPC52PCL	Color								
STC-SPB163PCL	Monochrome	1.6M	155 fps	1440 × 1080	1/2.9	3.45 × 3.45	IMX273	C	PoCL, automatically switched, SDR connector × 1
STC-SPC163PCL	Color								
STC-SPB202PCL	Monochrome	2M	89.1 fps	1620 × 1240	1/1.7	4.5 × 4.5	IMX430	C	PoCL, automatically switched, SDR connector × 2
STC-SPC202PCL	Color								
STC-CMB200PCL	Monochrome	2M	333.3 fps	2048 × 1088	2/3	5.5 × 5.5	CMV2000	C	PoCL, automatically switched, SDR connector × 2
STC-CMC200PCL	Color								
STC-CMB200PCL-NIR	Monochrome NIR								
STC-SPB312PCL	Monochrome	3.2M	55.4 fps	2048 × 1536	1/1.8	3.45 × 3.45	IMX265	C	PoCL, automatically switched, SDR connector × 1
STC-SPC312PCL	Color								
STC-SPB322PCL	Monochrome	3.2M	216.2 fps	2048 × 1536	1/1.8	3.45 × 3.45	IMX252	C	PoCL, automatically switched, SDR connector × 2
STC-SPC322PCL	Color								
STC-CMB401PCL	Monochrome	4M	179.2 fps	2048 × 2048	1	5.5 × 5.5	CMV4000	C	PoCL, automatically switched, SDR connector × 2
STC-CMC401PCL	Color								
STC-CMB401PCL-NIR	Monochrome NIR								
STC-APB503PCL	Monochrome	5M	14 fps	2592 × 1944	1/2.5	2.2 × 2.2	MT9P031	C	PoCL only SDR connector × 2
STC-APC503PCL	Color								
STC-SPB500PCL	Monochrome	5M	35.7 fps	2448 × 2048	2/3	3.45 × 3.45	IMX264	C	PoCL, automatically switched, SDR connector × 1
STC-SPC500PCL	Color								
STC-SPB510PCL	Monochrome	5M	163.4 fps	2448 × 2048	2/3	3.45 × 3.45	IMX250	C	PoCL, automatically switched, SDR connector × 2
STC-SPC510PCL	Color								
STC-SPB881PCL	Monochrome	8.9M	20.6 fps	4096 × 2160	1	3.45 × 3.45	IMX267	C	PoCL, automatically switched, SDR connector × 1
STC-SPC881PCL	Color								
STC-SPB891PCL	Monochrome	8.9M	91.9 fps	4096 × 2160	1	3.45 × 3.45	IMX255	C	PoCL, automatically switched, SDR connector × 2
STC-SPC891PCL	Color								
STC-SPB122BPCL	Monochrome	12.3M	15 fps	4096 × 3000	1.1	3.45 × 3.45	IMX304	C	PoCL, automatically switched, SDR connector × 1
STC-SPC122BPCL	Color								
STC-SPB123BPCL	Monochrome	12.3M	66.9 fps	4096 × 3000	1.1	3.45 × 3.45	IMX253	C	PoCL, automatically switched, SDR connector × 2
STC-SPC123BPCL	Color								
STC-CMB120APCL	Monochrome	12M	62.3 fps	4096 × 3072	1.76	5.5 × 5.5	CMV12000	M42	PoCL, automatically switched, SDR connector × 2
STC-CMC120APCL	Color								
STC-CMB120APCL-F	Monochrome							F	PoCL, automatically switched, SDR connector × 2
STC-CMC120APCL-F	Color								

Go to the next page

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-OSB250CL	Monochrome	25M	31.8 fps	5120 × 5120	APS-H (32.6 mm diagonal)	4.5 × 4.5	PYTHON 25K	M42	PoCL not supported SDR connector × 2
STC-OSB250CL-F								F	PoCL not supported SDR connector × 2

Accessories

Mount Conversion Adapter

Model	Applicable Model	General Specifications
M42-F-R	12M, 25M	M42 P=1 FB=10 mm → F mount Conversion Adapter

Tripod Mount

Model	Applicable Model
TP-JQA	VGA, 2M (CM*200PCL), 3.2M, 4M, 5M (SP*500/510PCL), 8.9M, 12.3M




Power Supply and I/O Cables

Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m




Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension






STC-CMB/CMC33PCL

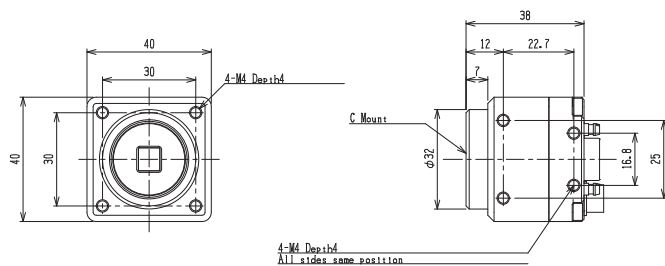






STC-CMB/CMC200PCL
STC-CMB/CMC401PCL

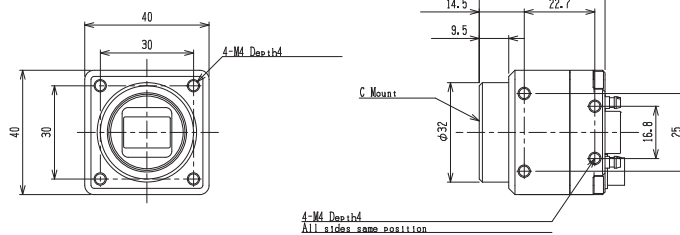

STC-APB/APC503PCL




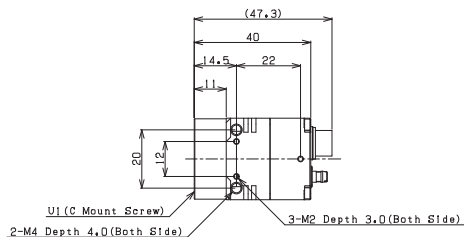




STC-SPB/SPC43PCL
STC-SPB/SPC52PCL
STC-SPB/SPC163PCL
STC-SPB/SPC202PCL









Drawing dimension




STC-SPB/SPC322PCL
STC-SPB/SPC510PCL
STC-SPB/SPC891PCL
STC-SPB/SPC123BPCL






STC-SPB/SPC312PCL
STC-SPB/SPC500PCL
STC-SPB/SPC881PCL
STC-SPB/SPC122BPCL






STC-CMB/CMC120APCL

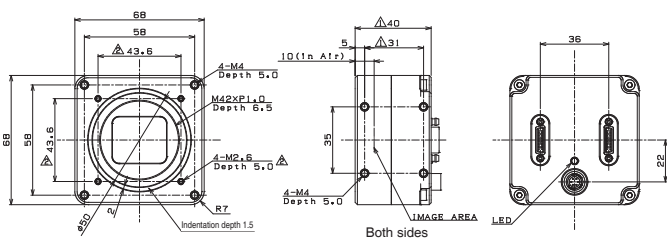




STC-CMB/CMC120APCL-F

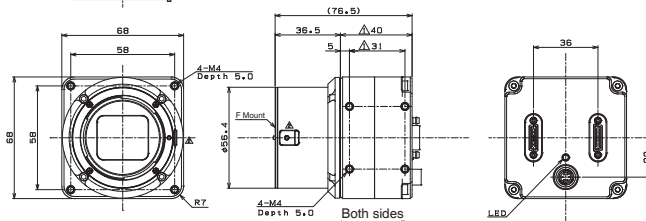

STC-OSB250CL

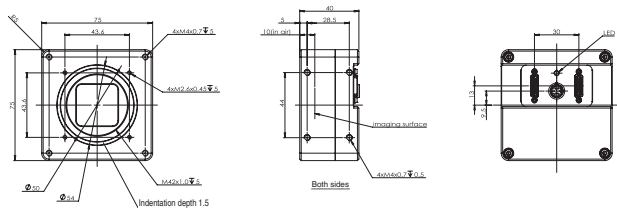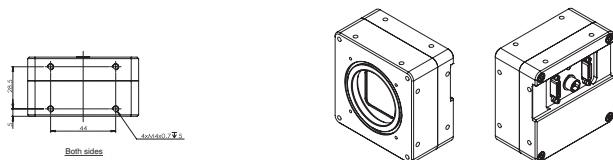

STC-OSB250CL-F

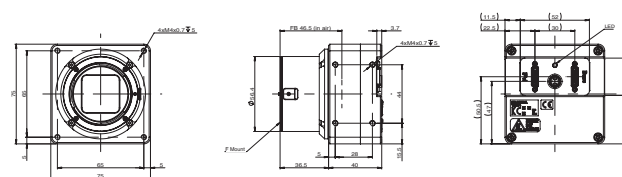

Camera Link Remote Head Camera



Description

Ultra-compact remote head Camera Link camera

Features

Separate sensor head for installation in previously difficult locations

Bend-resistant cable ideal for moving parts

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount	General Specifications
STC-RBS43PCL-SM12	Monochrome	0.4M	523.6 fps	720 × 540	1/2.9	6.9 × 6.9	IMX287	S	PoCL, automatically switched, SDR connector × 1 Cable from rear, cable length: 2.5 m
STC-RCS43PCL-SM12	Color								
STC-RBS43PCL-UM12	Monochrome								
STC-RCS43PCL-UM12	Color								
STC-RBS163PCL-SM12	Monochrome	1.6M	236.3 fps	1440 × 1080	1/2.9	3.45 × 3.45	IMX273	S	PoCL, automatically switched, SDR connector × 1 Cable from rear, cable length: 2.5 m
STC-RCS163PCL-SM12	Color								
STC-RBS163PCL-UM12	Monochrome								
STC-RCS163PCL-UM12	Color								



Accessories

Power Supply and I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m





Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension



STC-RBS/RCS43PCL-SM12
STC-RBS/RCS163PCL-SM12








Upward
↑

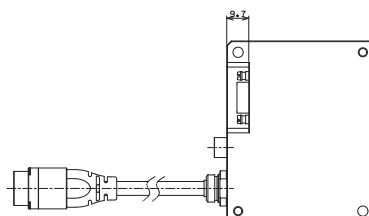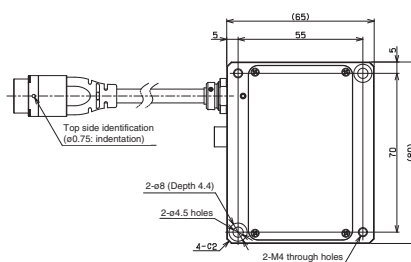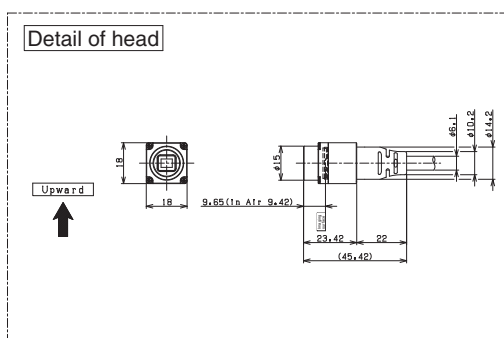

STC-RBS/RCS43PCL-UM12
STC-RBS/RCS163PCL-UM12



Upward
↑

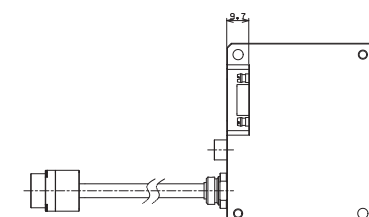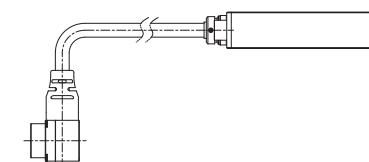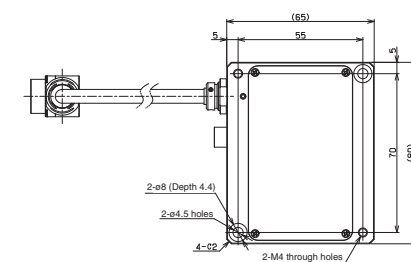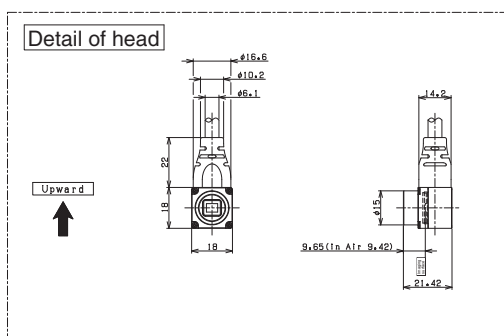

Camera Link Line Scan Camera



Description

Camera Link Line Scan Camera

Features

2K-16K models with high-speed CMOS sensor

A rich assortment of features including FFC and ROI;
compact case designed for easy installation

Product Line-up

Model	Monochrome/Color	Resolution	Line Rate	Pixel size	Sensor	Sensor Type	Lens Mount
FS-B2KU7CLU-C	Monochrome	2048 × 1	80 kHz	7 μm	DR-2K-7	Single	C
FS-B2KU7CLU-F							F
FS-B2KU7CLU-M42							M42
FS-B4KU7CLU-F		4096 × 1		7 μm	DR-4K-7	Single	F
FS-B4KU7CLU-M42							M42
FS-B4KU35CLU-C		4096 × 1		3.5 μm	DR-4K-3.5	Single	C
FS-B4KU35CLU-F							F
FS-B4KU35CLU-M42							M42
FS-B8KU7CLU-M72		8192 × 1		7 μm	DR-8K-7	Single	M72
FS-B8KU35CLU-F		8192 × 1		3.5 μm	DR-8K-3.5	Single	F
FS-B8KU35CLU-M42							M42
FS-B16KU35CLU-M72		16384 × 1	40 kHz	3.5 μm	DR-16K-3.5	Single	M72
FS-B2KU7DCLU-C	Color	2048 × 2	160 kHz/ 80 kHz	7 μm	DR-2 × 2K-7-inver	Dual	C
FS-B2KU7DCLU-F							F
FS-B2KU7DCLU-M42							M42
FS-B4KU7DCLU-F		4096 × 2	160 kHz	7 μm	DR-2 × 4K-7-inver	Dual	F
FS-B4KU7DCLU-M42							M42
FS-B8KU7DCLU-M72		8192 × 2		7 μm	DR-2 × 8K-7	Dual	M72
FS-C2KU7DCLU-C		Color	2048 × 2	26 kHz	7 μm	DR-2 × 2K-7-inver-RGB	Dual
FS-C2KU7DCLU-F	F						
FS-C2KU7DCLU-M42	M42						
FS-C4KU7DCLU-F	4096 × 2		13 kHz	7 μm	DR-2 × 4K-7-inver-RGB	Dual	F
FS-C4KU7DCLU-M42							M42
FS-C8KU7DCLU-M72	8192 × 2		40 kHz	7 μm	DR-2 × 8K-7-RGB	Dual	M72


Accessories

Power Supply and I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m


Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Drawing dimension


C Mount (2K/4K)

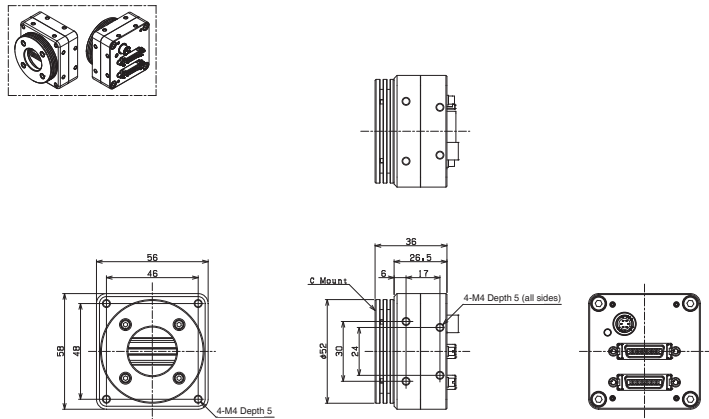


F Mount (2K/4K/8K)

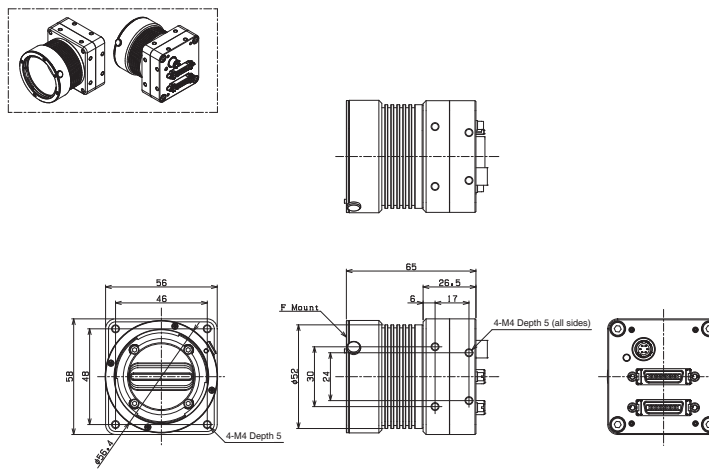

M42 Mount (2K/4K/8K)

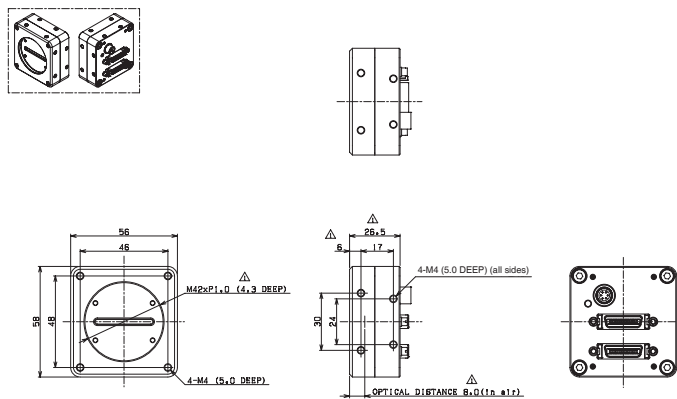

M72 Mount (8K/16K)

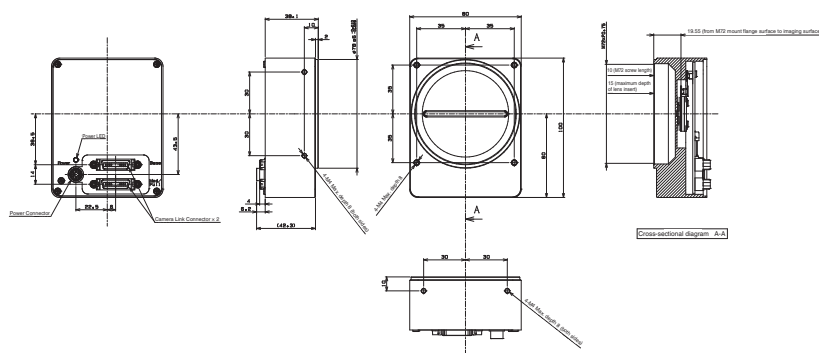

4K HDMI Camera



Description

HDMI Output 4K Color Camera

Features

- 4K video can be output at 60 fps to monitor directly connected via HDMI cable
- Available 120 fps output (1080 p) at Full HD mode (1080P/120 fps monitor)
- Connectable to the monitor directly using HDMI connector
- Optimized for observing system which cannot use PC

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-HD853HDMI	Color	2160P	60 fps	3840 × 2160	1/2.5	1.62 × 1.62	IMX274	C







Accessories

Remote Control Unit		
Model	Applicable Model	General Specifications
RC-HD133	HDMI/DVI/SDI	ø3.5 stereo pin jack

Note. Ask your Omron representative about AC adapter.

Drawing dimension

STC-HD853HDMI

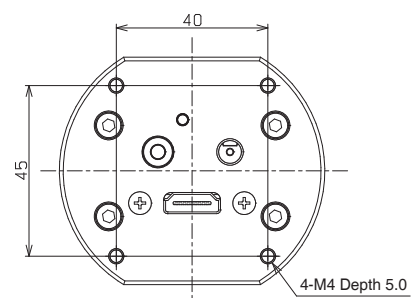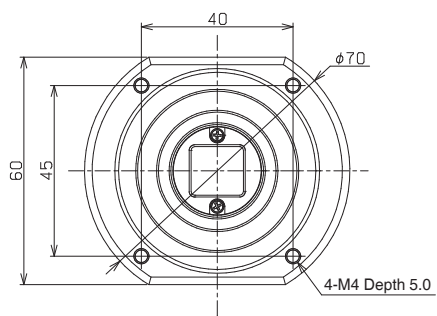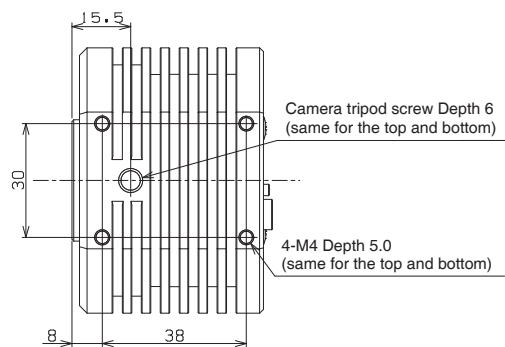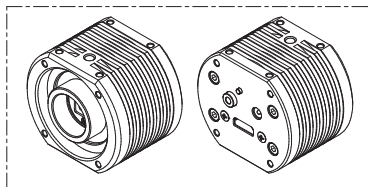

HD High-Definition Camera



Description

DVI Output Color Camera

Features

Connect directly to monitor with HDMI connector to build observing system without PC. Use of optional remote unit enables crosshair and shadow masks to be displayed on screen.

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-HD203DV	Color	1080P/1080i	60 fps	1920 × 1080	1/2.8	2.8 × 2.8	IMX136	C
STC-HD203DV-CS								CS
STC-HD213DV*							IMX291	C
STC-HD213DV-CS*								CS

Note. Sales of STC-HD203DV and HD203DV-CS are set to be discontinued. STC-HD213DV and HD213DV-CS are successors to these products.
 * These models are coming soon.

Accessories

Mount Conversion Adapter		
Model	Applicable Model	General Specifications
CS-C-R	CS Mount Series	


Remote Control Unit		
Model	Applicable Model	General Specifications
RC-HD133	HDMI/DVI/SDI	ø3.5 stereo pin jack

Note. Ask your Omron representative about AC adapter.


HDMI/DVI/SDI

Drawing dimension

STC-HD203DV

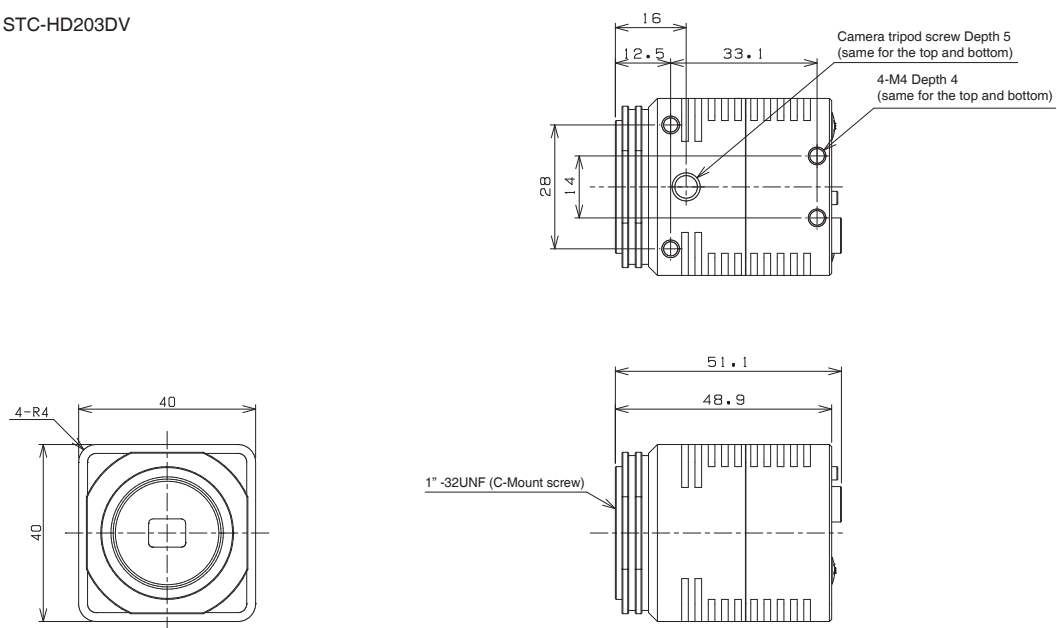

STC-HD203DV-CS

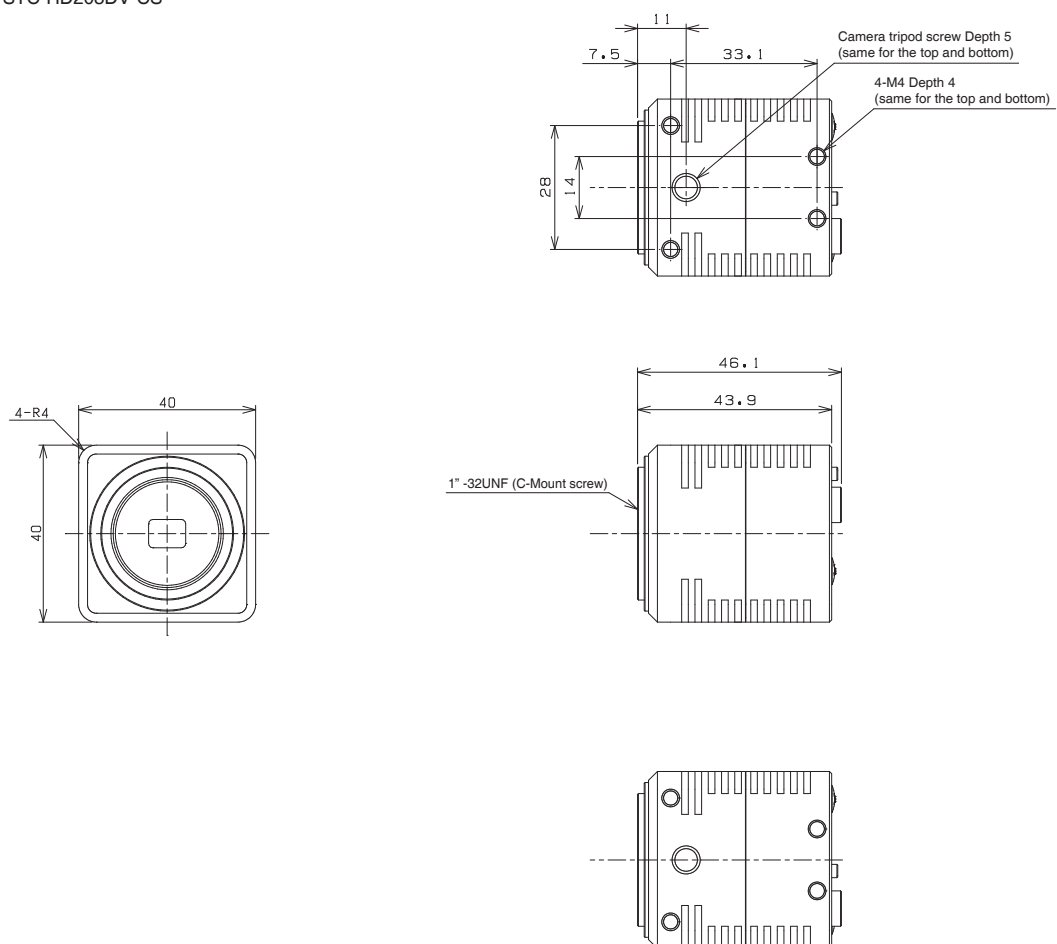

HD-SDI High-Definition Camera



Description

HD-SDI Output Color Camera

Features

Connect directly to monitor with versatile BNC connector. Suitable for long distance image transmission. Use of optional remote unit enables crosshair and shadow masks to be displayed on screen.

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-HD203SDI	Color	1080P/1080i	60 fps	1920 × 1080	1/2.8	2.8 × 2.8	IMX136	C
STC-HD203SDI-CS								CS
STC-HD213SDI*							IMX291	C
STC-HD213SDI-CS*								CS

Note. Sales of STC-HD203SDI and HD203SDI-CS are set to be discontinued. STC-HD213SDI and HD213SDI-CS are successors to these products.

* These models are coming soon.

Accessories


Mount Conversion Adapter		
Model	Applicable Model	General Specifications
CS-C-R	CS Mount Series	

Remote Control Unit		
Model	Applicable Model	General Specifications
RC-HD133	HDMI/DVI/SDI	ø3.5 stereo pin jack


Note. Ask your Omron representative about AC adapter.

Drawing dimension

STC-HD203SDI

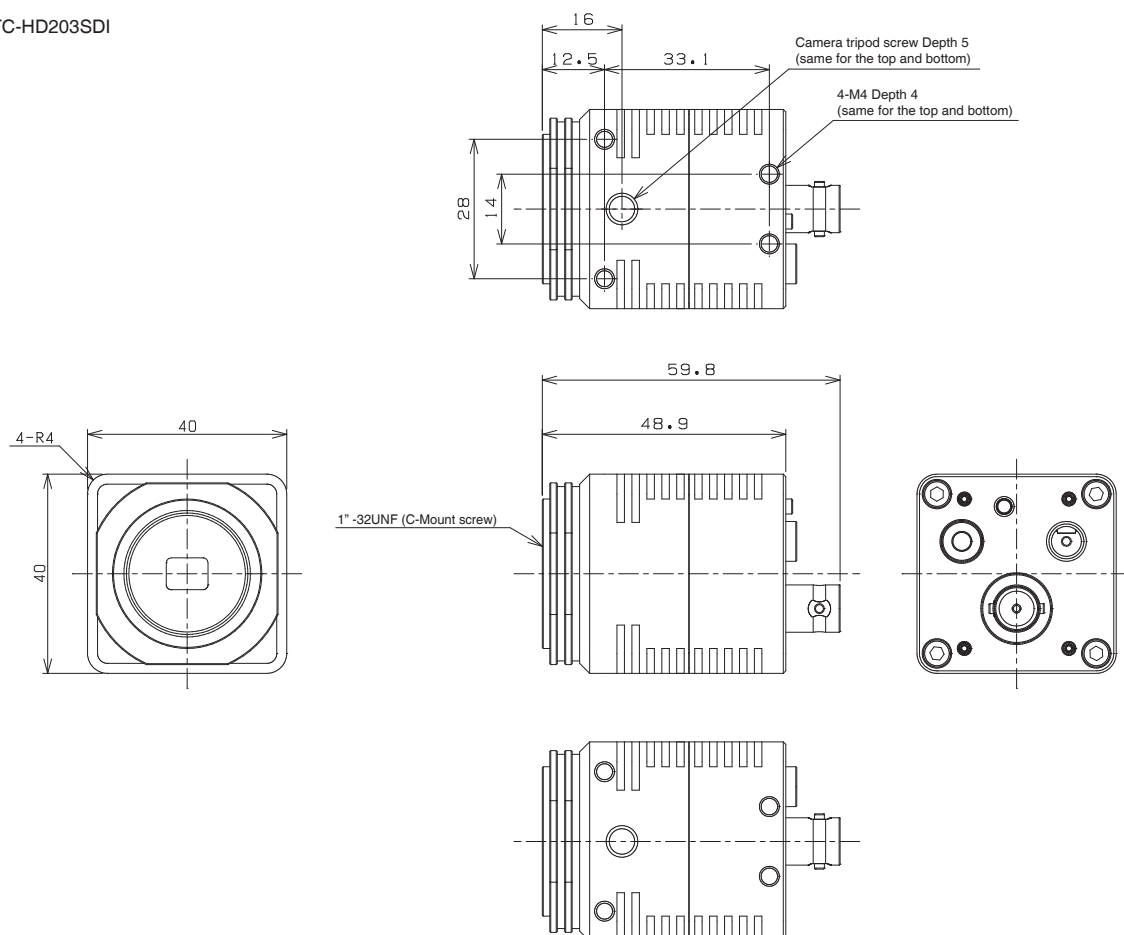

STC-HD203SDI-CS

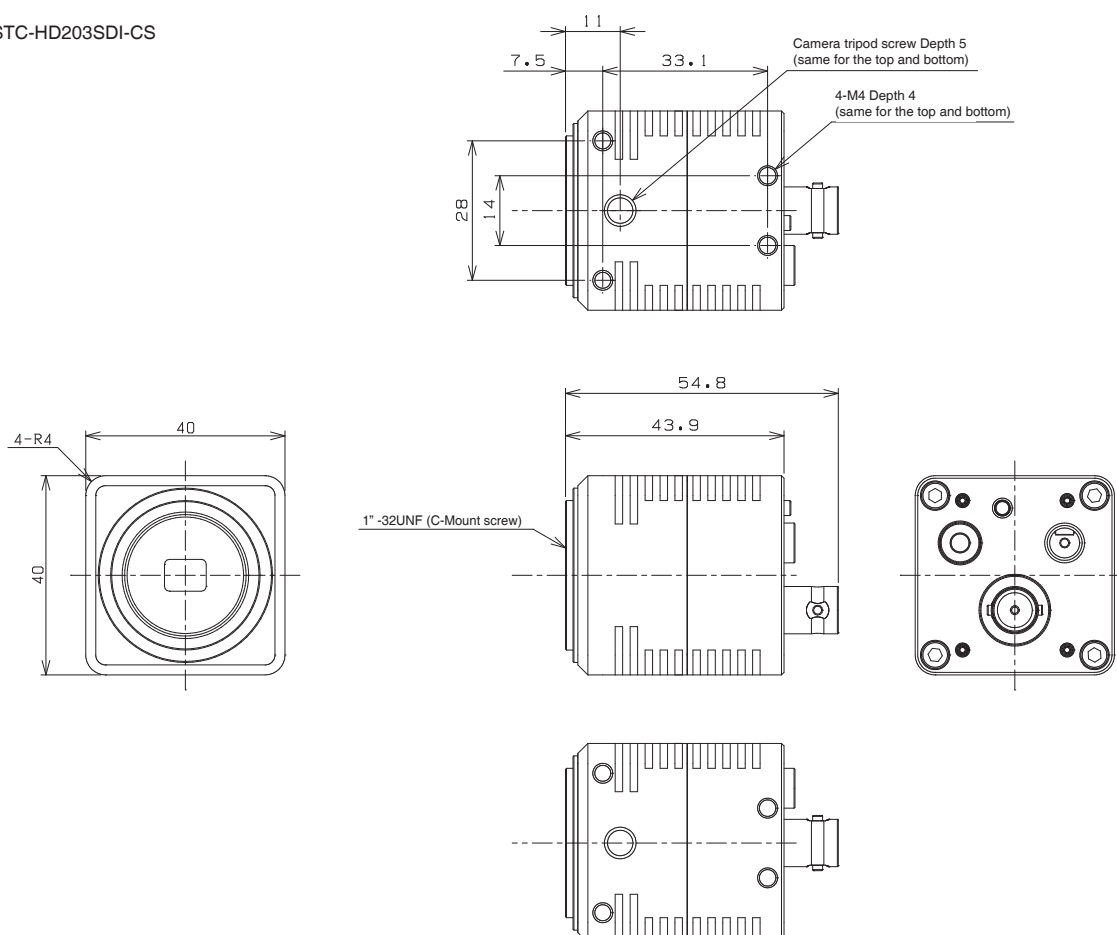

Analog Progressive Camera



Description

Progressive Scan Monochrome CCD Camera

Features


Small Camera with Progressive Scan Monochrome CCD
SHARP CCD sensor is adapted and suitable to replacement

Product Line-up

Model	Monochrome/Color	Resolution	Frame Rate	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-MB33SS	Monochrome	VGA	90 fps	648 × 494	1/3	7.4 × 7.4	RJ33B4AA0DT	C

Drawing dimension

STC-MB33SS

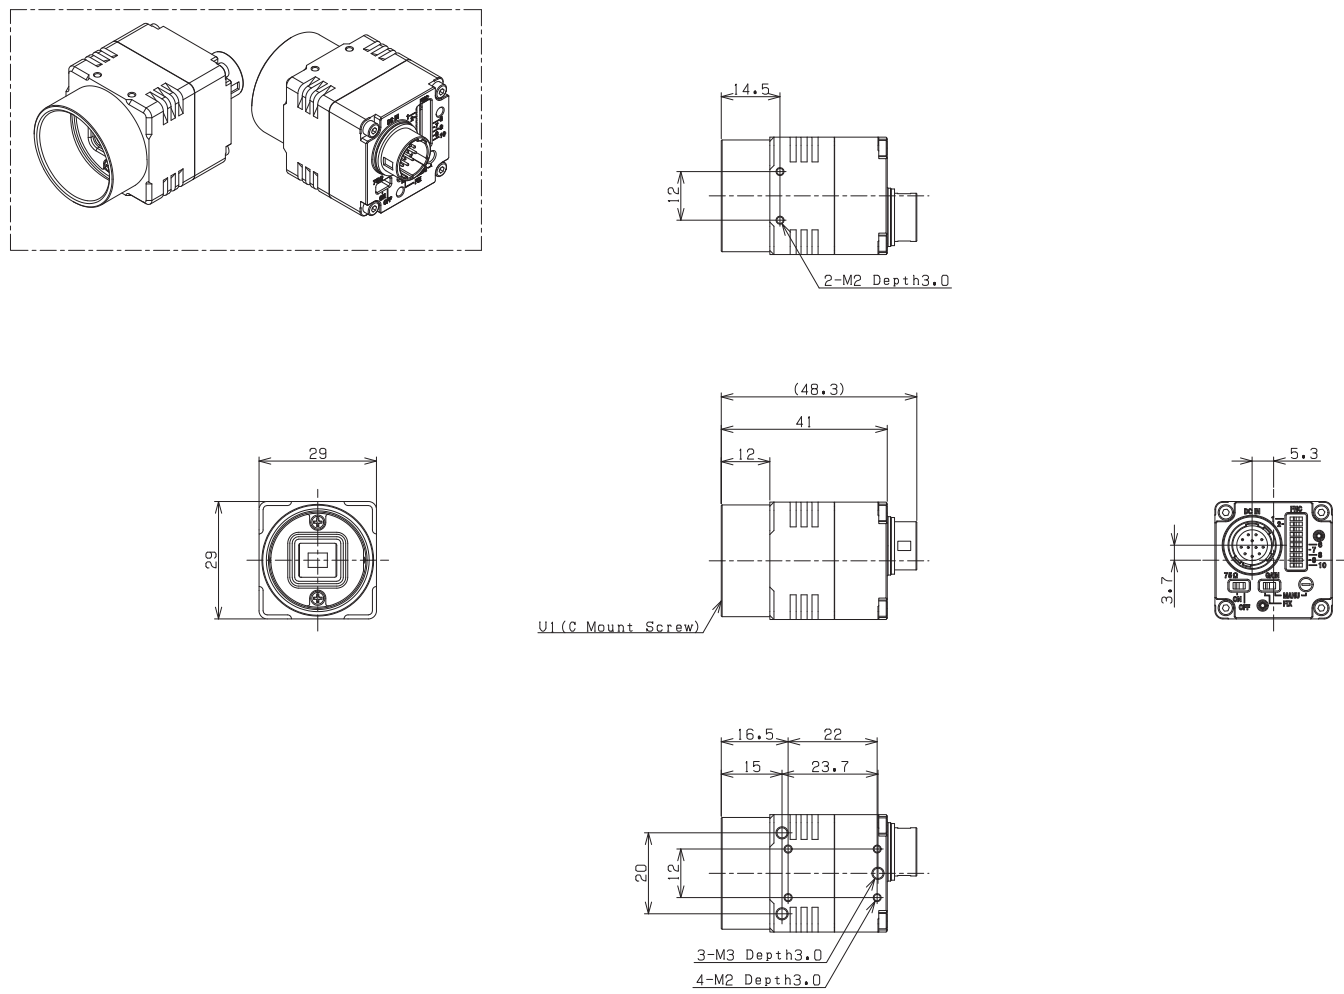

TV Format Color Camera S133N-B Series



Description

1/3.2" 0.65 Mpix TV format color
CMOS camera

Features

DC jack type and terminal block type for power input

Product Line-up

Model	Monochrome/Color	Resolution	Video Format	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Lens Mount
STC-S133N-B*	Color	0.65M	NTSC	1280 × 486	1/3.2	3.5 × 3.5	ISX017	CS
STC-S133P-B*			PAL	1211 × 576				

* Select a model from the Line-up list below when ordering.

Accessories

Mount Conversion Adapter		
Model	Applicable Model	General Specifications
CS-C-R	CS Mount Series	

Remote Control Unit		
Model	Applicable Model	General Specifications
RC-S133B	S133N-B Series	



Note. Ask your Omron representative about AC adapter.

Line-up

Model	Monochrome/Color	Sensor Size	Lens Mount	Video Format	General Specifications
STC-S133N-BJ	Color	1/3.2	CS	NTSC	Case, output: BNC
STC-S133P-BJ				PAL	
STC-S133N-BT				NTSC	
STC-S133P-BT				PAL	





Drawing dimension

[External Connector Specification]



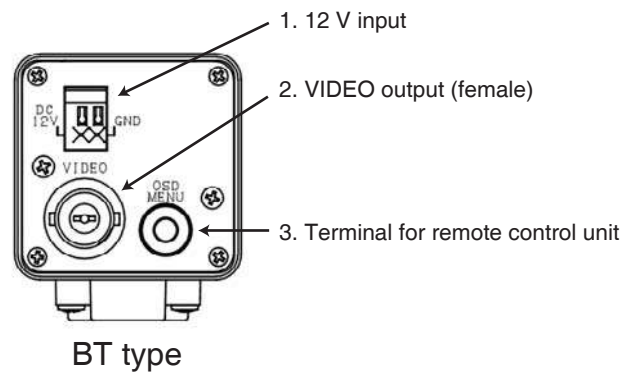
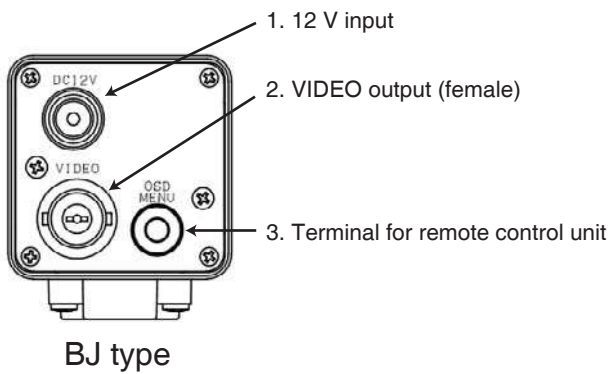


[Drawing dimension]

BJ type

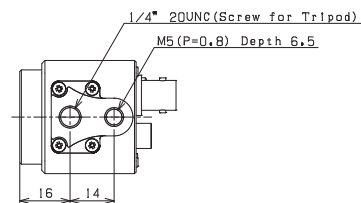

BT type

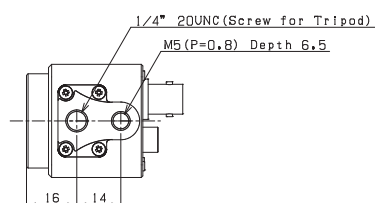

Small Board Camera STC-S133 Series



Description

Small Board Camera

Features

Compact and lightweight camera for integration into machines
Select the best interface to suit application

Product Line-up

Model	Monochrome/Color	Resolution	Effective Pixels (H × V)	Sensor Size	Cell Size (μm)	Sensor	Interface	
STC-S133N-**	Color	0.65M	1280 × 486	1/3.2	3.5 × 3.5	ISX017	NTSC	
STC-S133P-**			1211 × 576				PAL	
STC-S133UVC-**		1.3M	1280 × 960				USB3.0 (UVC)	
STC-S133MIP-**							MIPI	

* Select a model from the Line-up list below when ordering.

Line-up

TV Format (NTSC/PAL)						
Model	Monochrome/Color	Frame Rate	Sensor Size	Lens Mount	General Specifications	
STC-S133N	Color	30 fps	1/3.2	---	DPF, Board, Base (without lens mount)	
STC-S133P		25 fps		---	DPF, Board, Base (without lens mount)	
STC-S133N-NF		30 fps		---	Board, Base (without lens mount), No filter	
STC-S133P-NF		25 fps		---	Board, Base (without lens mount), No filter	
STC-S133N-L		30 fps		S	DPF, Board, S Mount	
STC-S133N-LS		30 fps		S	DPF, Board, S Mount, Lens fixing washer	
STC-S133P-L		25 fps		S	DPF, Board, S Mount	
STC-S133N-CS		30 fps		CS	DPF, Board, CS Mount	
STC-S133P-CS		25 fps		CS	DPF, Board, CS Mount	
STC-S133N-I		30 fps		---	IRCF, Board, Base (without lens mount)	
STC-S133P-I		25 fps		---	IRCF, Board, Base (without lens mount)	
STC-S133N-IL		30 fps		S	IRCF, Board, S Mount	
STC-S133P-IL		25 fps		S	IRCF, Board, S Mount	
STC-S133N-ICS		30 fps		CS	IRCF, Board, CS Mount	
STC-S133P-ICS		25 fps		CS	IRCF, Board, CS Mount	
STC-S133N-ILS		30 fps		S	IRCF, Board, S Mount, Lens fixing washer	
STC-S133N-AL		30 fps		S	DPF, Case, S Mount	
STC-S133P-AL		25 fps		S	DPF, Case, S Mount	
STC-S133N-ACS		30 fps		CS	DPF, Case, CS Mount	
STC-S133P-ACS		25 fps		CS	DPF, Case, CS Mount	
STC-S133N-IAL		30 fps		S	IRCF, Case, S Mount	
STC-S133P-IAL		25 fps		S	IRCF, Case, S Mount	
STC-S133N-IACS		30 fps		CS	IRCF, Case, CS Mount	
STC-S133P-IACS		25 fps		CS	IRCF, Case, CS Mount	

Note: DPF: Dual Pass Filter, IRCF: IR Cut Filter

Go to the next page


USB3.0 (UVC)					
Model	Monochrome/Color	Frame Rate	Sensor Size	Lens Mount	General Specifications
STC-S133UVC-BL	Color	60 fps	1/3.2	---	IRCF, Board, Base (without lens mount), Connector from bottom
STC-S133UVC-BLL				S	IRCF, Board, S Mount, Connector from bottom
STC-S133UVC-BLCS				CS	IRCF, Board, CS Mount, Connector from bottom
STC-S133UVC-DBL				---	DPF, Board, Base (without lens mount), Connector from bottom
STC-S133UVC-DBLL				S	DPF, Board, S Mount, Connector from bottom
STC-S133UVC-DBLCS				CS	DPF, Board, CS Mount, Connector from bottom
STC-S133UVC-ALL				S	IRCF, Case, S Mount, Connector from bottom
STC-S133UVC-ALCS				CS	IRCF, Case, CS Mount, Connector from bottom
STC-S133UVC-DALL				S	DPF, Case, S Mount, Connector from bottom
STC-S133UVC-DALCS				CS	DPF, Case, CS Mount, Connector from bottom
STC-S133UVC-BS				---	IRCF, Board, Base (without lens mount), Connector from rear
STC-S133UVC-BSL				S	IRCF, Board, S Mount, Connector from rear
STC-S133UVC-BSCS				CS	IRCF, Board, CS Mount, Connector from rear
STC-S133UVC-DBS				---	DPF, Board, Base (without lens mount), Connector from rear
STC-S133UVC-DBSL				S	DPF, Board, S Mount, Connector from rear
STC-S133UVC-DBSCS				CS	DPF, Board, CS Mount, Connector from rear

Note. DPF: Dual Pass Filter, IRCF: IR Cut Filter


MIPI					
Model	Monochrome/Color	Frame Rate	Sensor Size	Lens Mount	General Specifications
STC-S133MIP	Color	60 fps	1/3.2	---	IRCF, Board, Base (without lens mount)
STC-S133MIP-CS				CS	IRCF, Board, CS Mount
STC-S133MIP-L				S	IRCF, Board, S Mount
STC-S133MIP-NF				---	Board, No filter
STC-S133MIP-D				---	DPF, Board, Base (without lens mount)
STC-S133MIP-DCS				CS	DPF, Board, CS Mount
STC-S133MIP-DL				S	DPF, Board, S Mount
STC-S133MIP-ALL				S	IRCF, Case, S Mount
STC-S133MIP-ALCS				CS	IRCF, Case, CS Mount
STC-S133MIP-DALL				S	DPF, Case, S Mount
STC-S133MIP-DALCS				CS	DPF, Case, CS Mount

Note. DPF: Dual Pass Filter, IRCF: IR Cut Filter
Harness is included.


STC-S133N(P)-L/LS/IL/ILS

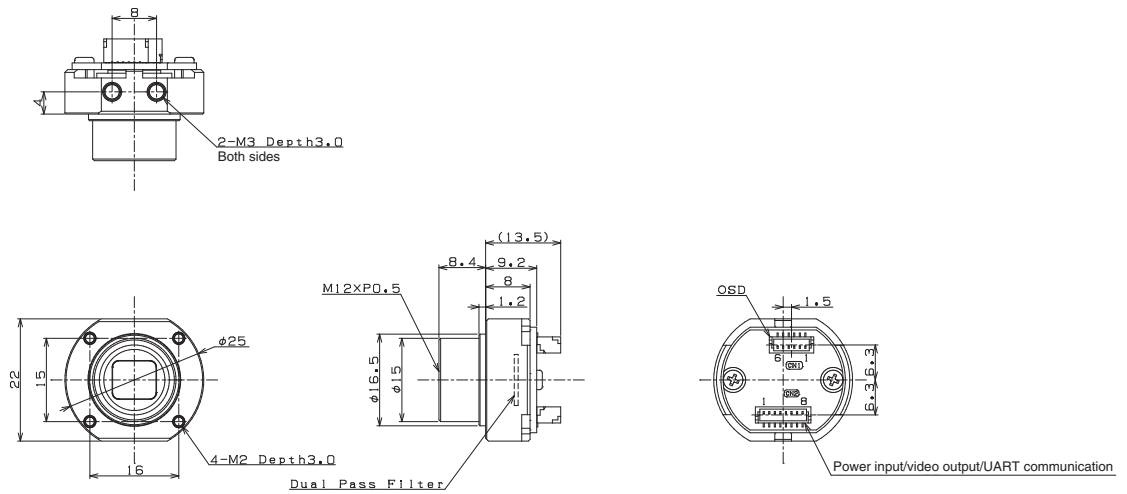


STC-S133N(P)-NF

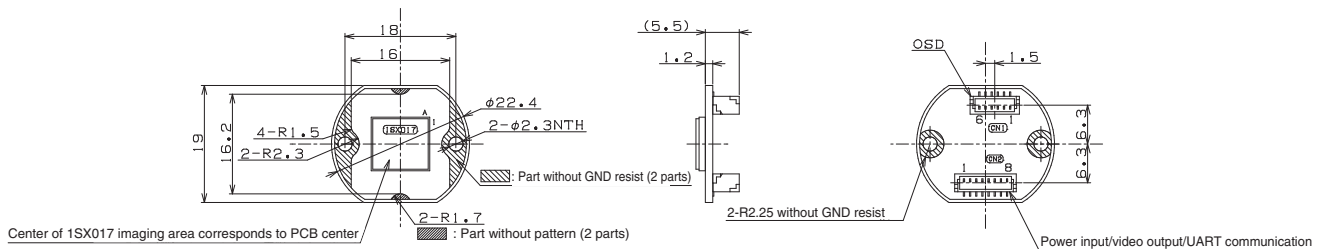


STC-S133N(P)-AL/IAL

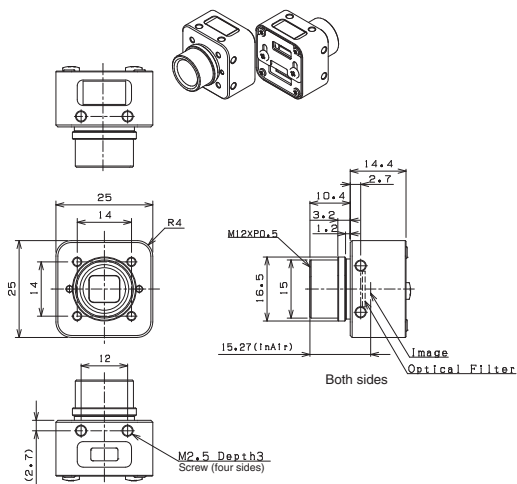


STC-S133N(P)-ACS/IACS

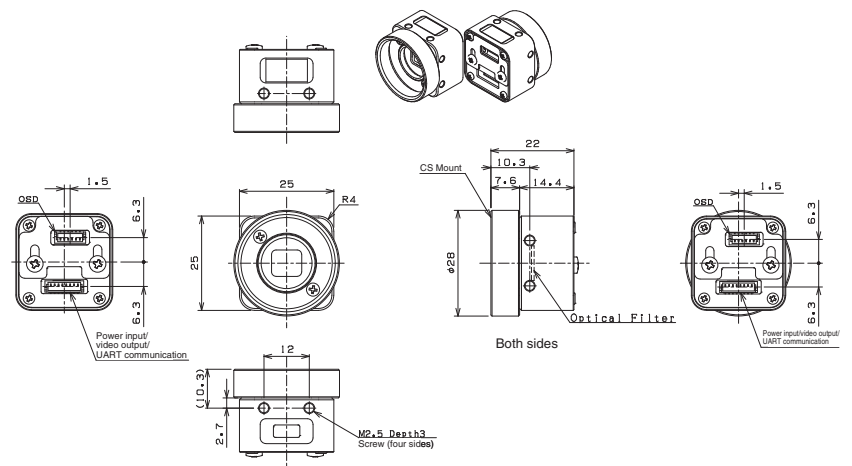


STC-S133MIP(D)

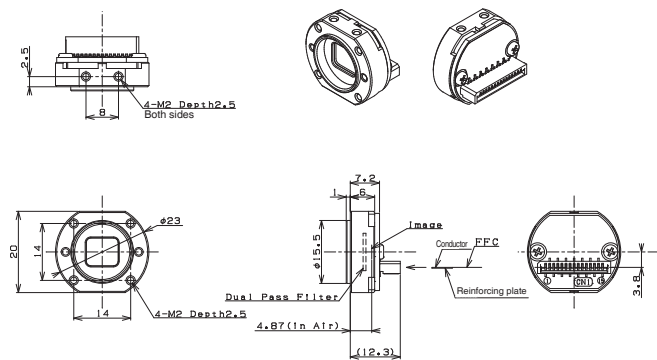


STC-S133MIP-L(DL)

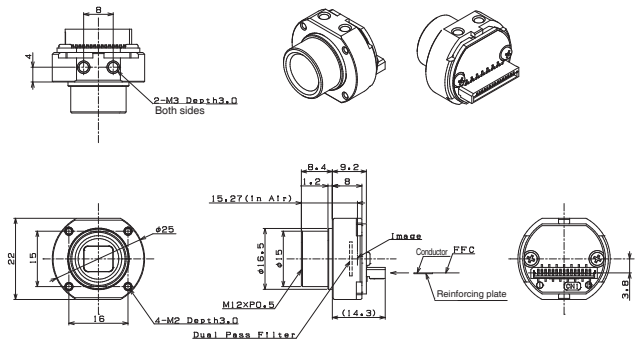


STC-S133MIP-CS(DCS)

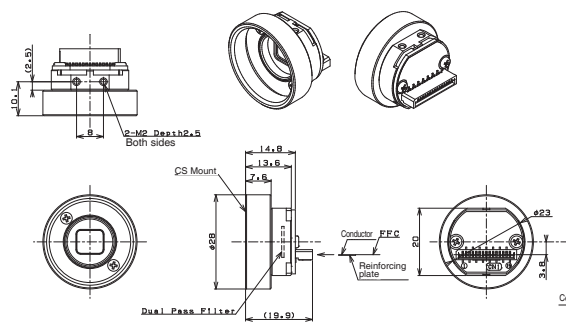


STC-S133MIP-NF

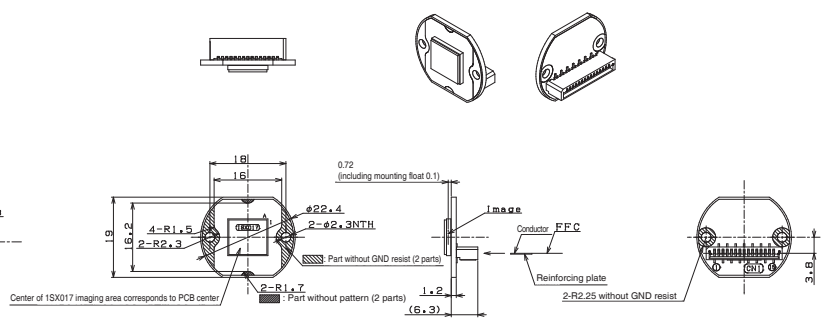


STC-S133MIP-ALL/DALL

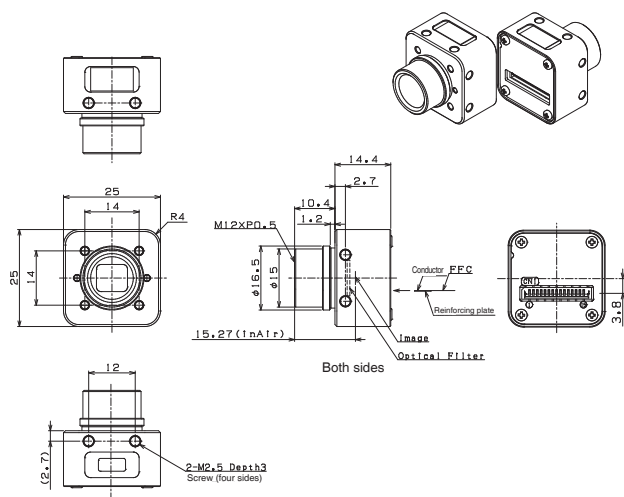


STC-S133MIP-ALCS/DALCS

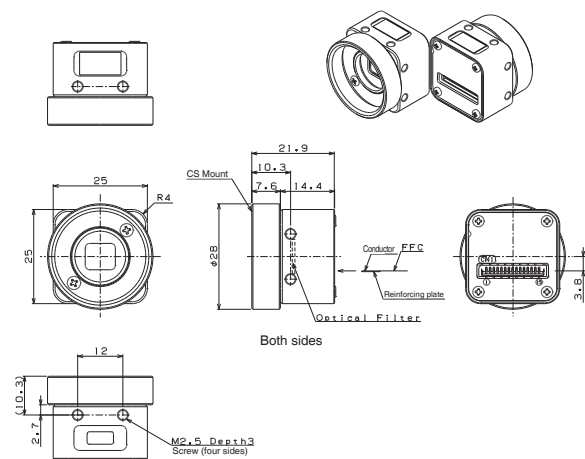


STC-S133UVC-ALL/DALL

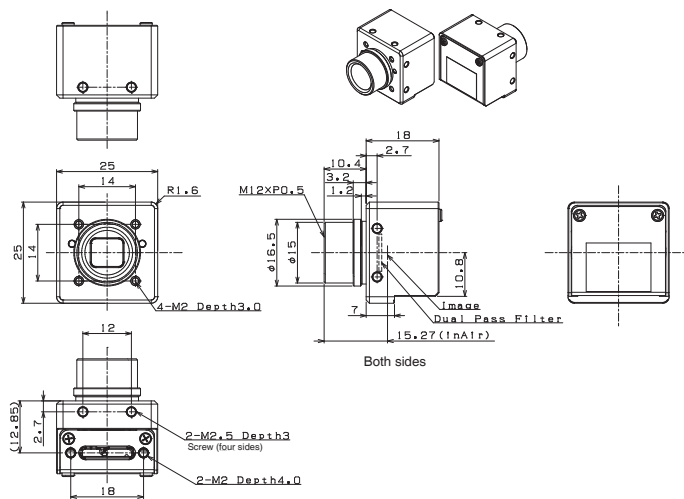


STC-S133UVC-ALCS/DALCS

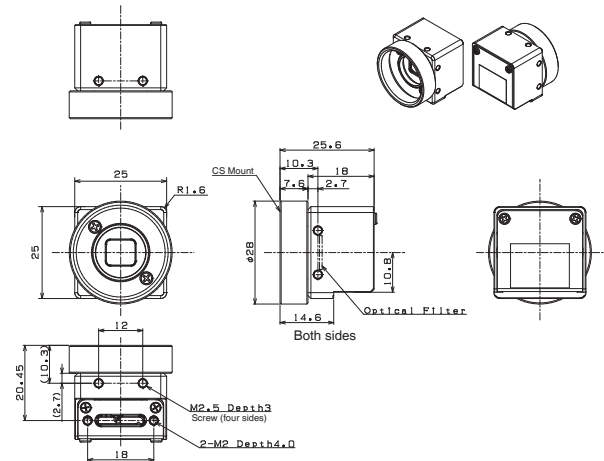


STC-S133UVC-BL(DBL)

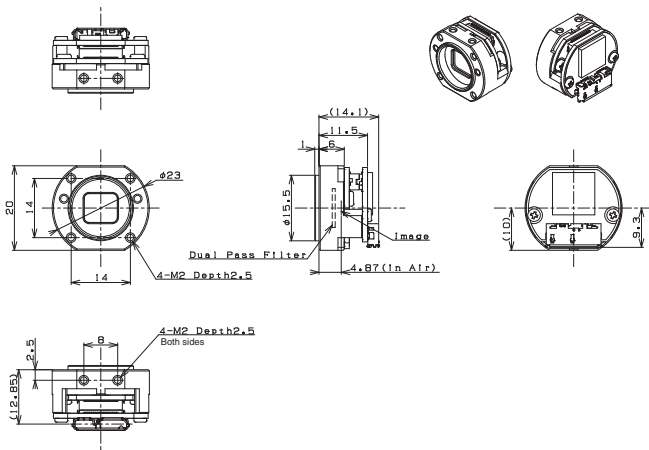


STC-S133UVC-BLL(DBLL)

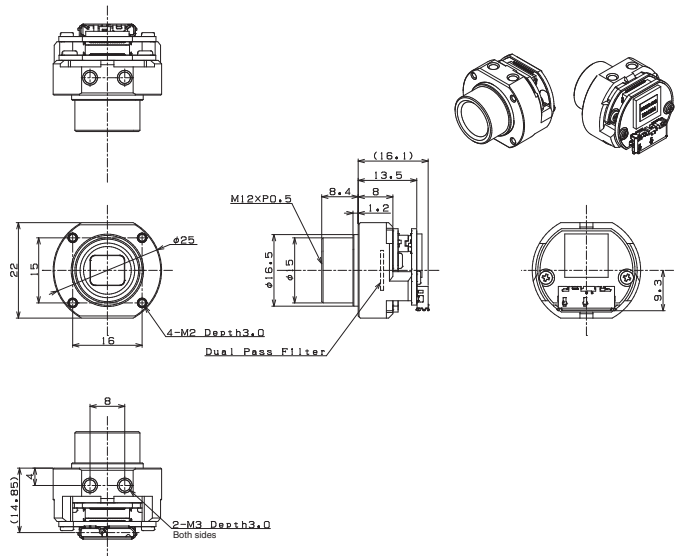


STC-S133UVC-BLCS(DBLCS)

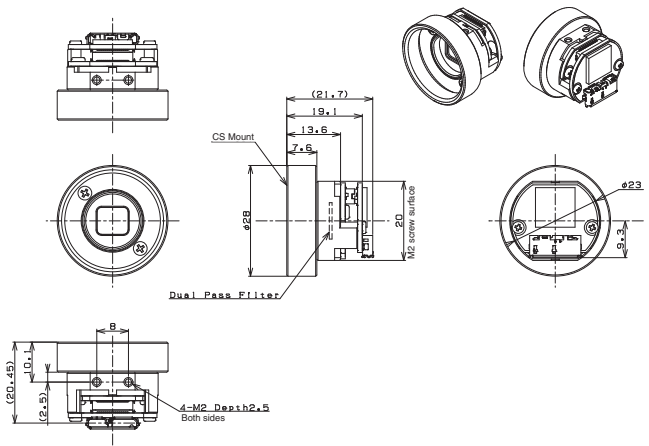


STC-S133UVC-BS(DBS)

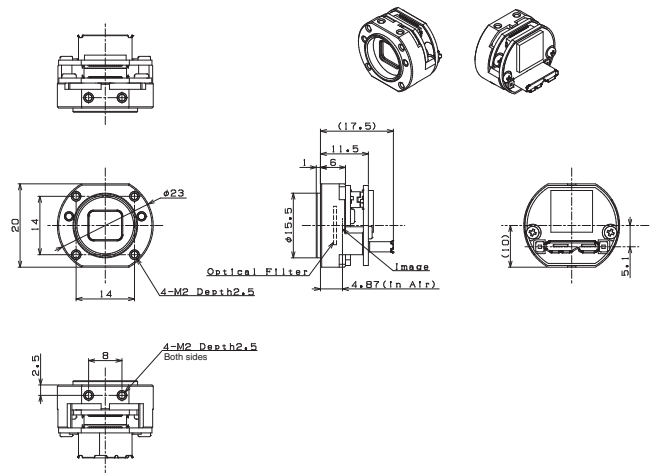

STC-S133UVC-BSL(DBSL)

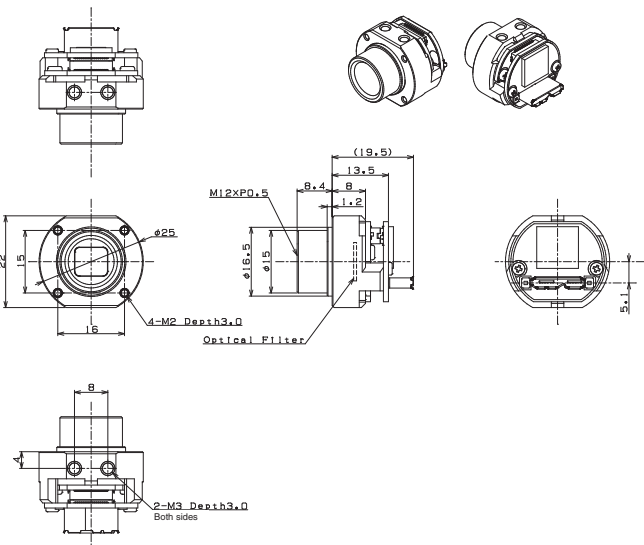

STC-S133UVC-BSCS(DBSCS)

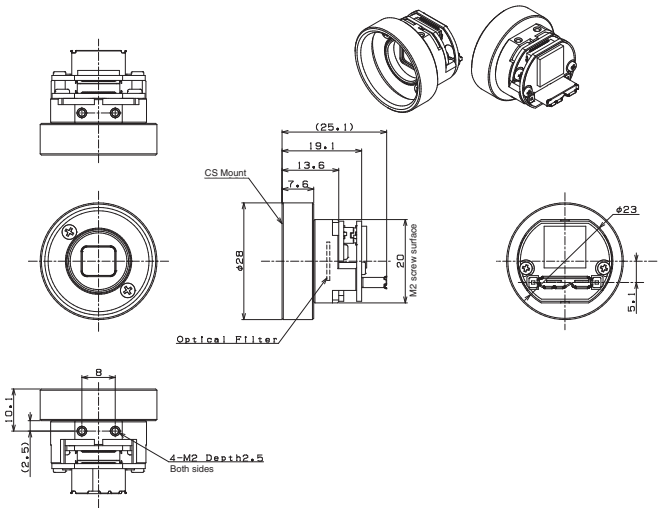

Accessory, Cable, others



Description

Optional items for using cameras

Screw-fastened GigE Cable



OMRON has made available a line of optional screw-fastened cables, responding to many requests for such cables when using GigE cameras in the FA applications.

Screw-Fastened GigE Cables	
Model	Length
FJ-VSG 3M	3 m
FJ-VSG 5M	5 m
FJ-VSG 10M	10 m
FJ-VSG 20M	20 m
FJ-VSG 40M	40 m

Power Supply and I/O Cables

Power Supply and I/O Cables	
Model	Length
FJ-VSP2 3M	3 m
FJ-VSP2 5M	5 m
FJ-VSP2 10M	10 m

Note. Please connect the cables according to the external connector specifications prescribed in your camera's specification documents, for faulty wiring can cause failure.

Screw-fastened USB3.0 Cable



USB 3.0 Cables (USB 3.0 Micro-B, with Camera-Side Fastening Screws)

Model	Length	Cable Type
CAB-USB3-02	2 m	Normal
CAB-USB3-03	3.5 m	
CAB-USB3-05	5 m	
CAB-USB3-07	7 m	
CAB-USB3-10	10 m	Normal high-transmission cables
CAB-USB3-02-RB	2 m	Robot cables
CAB-USB3-03-RB	3.5 m	
CAB-USB3-05-RB	5 m	
CAB-USB3-07-RB	7 m	

Note. Please make sure in advance that USB 3.0 cables operate correctly under your environment.

Screw Lock USB 3.0 Cables (Optional) / Robot Cables

Model	Applicable Model	General Specifications
NU3MBASU3S-2m	All USB3.0 Cameras	2 m, USB 3.0 Micro-B, with camera-side fastening screws, normal cables
NU3MBASU3S-3.5m	All USB3.0 Cameras	3.5 m, USB 3.0 Micro-B, with camera-side fastening screws, normal cables
NU3MBASU3B-2m	All USB3.0 Cameras	2 m, USB 3.0 Micro-B, with camera-side fastening screws, robot cables
NU3MBASU3B-3.5m	All USB3.0 Cameras	3.5 m, USB 3.0 Micro-B, with camera-side fastening screws, robot cables

Note. Please make sure that USB 3.0 cables operate correctly under your environment beforehand.

Note. Production of this series is set to be discontinued. Please consider using our CAB-USB3 USB 3.0 cables.

HDMI Cable



HDMI Cable

Model	Applicable Model	Length
CAB-HDMI-015	4K HD high vision (DVI) cameras	1.5 m
CAB-HDMI-02	4K HD high vision (DVI) cameras	2 m
CAB-HDMI-03	4K HD high vision (DVI) cameras	3 m
CAB-HDMI-05	4K HD high vision (DVI) cameras	5 m

Note. Please make sure in advance that HDMI cables operate correctly under your environment, including power supply capability.

HDMI Fiber-Optic Cables

Model	Applicable Model	Length
CAB-HDMI-10-OPT	4K HD high vision (DVI) cameras	10 m Provides power supply (with USB)
CAB-HDMI-20-OPT	4K HD high vision (DVI) cameras	20 m Provides power supply (with USB)
CAB-HDMI-30-OPT	4K HD high vision (DVI) cameras	30 m Provides power supply (with USB)
CAB-HDMI-50-OPT	4K HD high vision (DVI) cameras	50 m Provides power supply (with USB)
CAB-HDMI-70-OPT	4K HD high vision (DVI) cameras	70 m Provides power supply (with USB)
CAB-HDMI-100-OPT	4K HD high vision (DVI) cameras	100 m Provides power supply (with USB)

Note. Please make sure in advance that HDMI cables operate correctly under your environment, including power supply capability.

Coaxial Cable



BNC-BNC Cables

Model	Applicable Model	Connector Type	Length
BNC-BNC1	TV Format	BNC on both ends	1 m
BNC-BNC2			2 m
BNC-BNC3			3 m
BNC-BNC5			5 m
BNC-BNC10			10 m

BNC-RCA (Pin Jack) Cables

Model	Applicable Model	Connector Type	Length
BNC-RCA2	TV Format	BNC on one end and RCA on the other	2 m
BNC-RCA3			3 m
BNC-RCA5			5 m
BNC-RCA10			10 m

Harness for Power Supply/Signal Output



Harnesses for power supply and signal output for STC-S133N/P

Model	Applicable Model	General Specifications
KSAF005	For S133N/P	8-pin connector to power pin jack and BNC connector
KSAF006		8-pin connector to power pin jack and RCA connector

Mount Conversion Adapter



Adapter ring necessary when using C-mount lens with CS-mount camera

Adapter for converting M42 P=1 FB=10mm to F-mount when using 12M, 25M, or line sensor cameras

Model	Applicable Model	General Specifications
CS-C-R	CS Mount Series	CS mount → C mount conversion adapter
M42-F-R	12M, 25M, Line Scan Camera	M42 P=1 FB=10 mm → F mount conversion adapter



Tripod Mount



Optional adapter for fastening the camera with tripod screws

Model	Applicable Model	General Specifications
TP-HCA	Camera Link SPB/SPC43, 52, 163, 202PCL	
TP-JVA	0.4M, 1.6M, 2M, 2.3M, 3.2M, 4M, 5M (M*S500/510U3V)	
TP-JQA	USB3.0: 5M (Polarization), 8.9M, 12.3M, 20.4M Camera Link: VGA, 2M (CM*200PCL), 3.2M, 4M, 5M (SP*500/510PCL), 8.9M, 12.3M	
TP-KWA	GigE Vision M Series	
TP-KWA-IEA	GigE Vision M Series	Used to set M Series with sensor center at same height as that of S Series
TP-KWA2	STC-MBS/MCS881POE, STC-MBS/MCS122BPOE	

Remote Control Unit



The unit is connected to the pin jack on the back of the camera allowing various settings to be made with an on-screen display. All DVI/SDI models are applicable.

Model	Applicable Model	General Specifications
RC-HD133	4K HDMI/DVI/SDI	ø3.5 stereo pin jack
RC-S133	S133N/P Series	
RC-S133B	S133N-B Series	ø3.5 stereo pin jack

Accessory Fixed Focus Lens



Description


Small-diameter fixed focus lens for board cameras and remote head camera

S Mount (M12 P0.5) Lens



Model	Applicable Model	General Specifications
CV0205C	S Mount Series	f=2.5 mm, 1/3", F2.0, for 5M resolution
KVAB009		Lens fixing washer

USB 3.0 4ch Frame Grabber Board

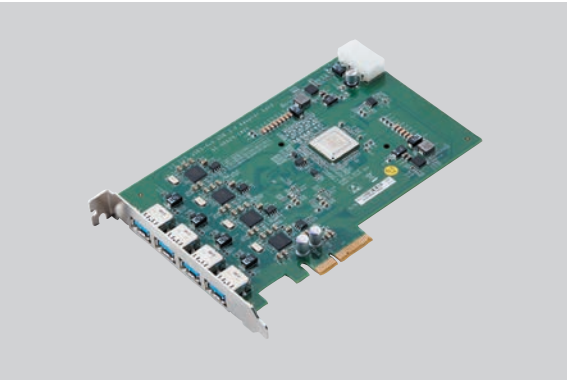

Description

4ch Frame Grabber Board for USB 3.0 Camera

Features

The 4-channel Frame Grabber Board includes the USB3.0 chips on each channel.
Adopting PCI Express Gen 3 × 4 lane connections, operation with greater stability than Gen 2 × 4 lane models can be ensured when using multiple high resolution, high-speed cameras.

Product Line-up	
Model	USB3-4ch
No. of ports	USB3.0 Standard A × 4 ports
Host I/F	PCI Express Gen3 × 4 lane
Operating power supply	On-board 5 VDC
Host controller	FL1100-1Q0-EX (FRESCO)
Supported OS	Windows7/8/10 and Linux
Motion camera	Omron Sentech USB3.0 Camera
Dimensions	167 (W) × 111.15 (H) mm (excluding protrusions)

Note. Confirm operation with your PC in advance.
Note. Use the latest USB driver version provided by FRESCO Logic.

Spectral Characteristics Chart

This is the Spectral Characteristics Chart of the image sensor (Area Sensor) published in this catalog.

	Model	Type	Page
1	IMX287	Monochrome	53
2	IMX433	Monochrome	53
3	IMX273	Monochrome	53
4	IMX174	Monochrome	54
5	IMX430	Monochrome	54
6	IMX249	Monochrome	54
7	IMX265	Monochrome	54
8	IMX252	Monochrome	54
9	IMX264	Monochrome	55
10	IMX250	Monochrome	55
11	IMX267	Monochrome	55
12	IMX255	Monochrome	55
13	IMX304	Monochrome	55
14	IMX253	Monochrome	55
15	IMX382-0ABR-C	Monochrome	56
16	IMX178	Monochrome	56
17	IMX428	Monochrome	56
18	IMX226	Monochrome	57
19	IMX183	Monochrome	57
20	CMV300	Monochrome	58
21	CMV2000	Monochrome	58
22	CMV4000	Monochrome	58
23	CMV12000	Monochrome	59
24	MT9P031	Monochrome	60
25	MT9J003	Monochrome	60
26	EV76C560ACT	Monochrome	59
27	PYTHON 25K	Monochrome	59
28	RJ33B4AA0DT	Monochrome	60
29	CMV2000	NIR	59
30	CMV4000	NIR	59

	Model	Type	Page
31	IMX287	Color	53
32	IMX433	Color	53
33	IMX273	Color	53
34	IMX174	Color	54
35	IMX430	Color	54
36	IMX249	Color	54
37	IMX265	Color	54
38	IMX252	Color	54
39	IMX264	Color	55
40	IMX250	Color	55
41	IMX267	Color	55
42	IMX255	Color	55
43	IMX304	Color	55
44	IMX253	Color	55
45	IMX382-0AQR-C	Color	56
46	IMX178	Color	56
47	IMX274	Color	57
48	IMX226	Color	57
49	IMX183	Color	57
50	ISX017	Color	58
51	IMX136	Color	58
52	IMX291	Color	58
53	CMV300	Color	58
54	CMV2000	Color	58
55	CMV4000	Color	58
56	CMV12000	Color	59
57	MT9P031	Color	60
58	EV76C560ACT	Color	59

This is the Spectral Characteristics Chart of the image sensor (Line Scan Camera) published in this catalog.


	Model	Type	Page
1	DR-2K-7	Monochrome	61
2	DR-4K-7	Monochrome	61
3	DR-4K-3.5	Monochrome	61
4	DR-8K-7	Monochrome	61
5	DR-8K-3.5	Monochrome	61
6	DR-16K-3.5	Monochrome	61
7	DR-2X2K-7-inver	Monochrome	61
8	DR-2X4K-7-inver	Monochrome	61
9	DR-2X8K-7	Monochrome	61

	Model	Type	Page
1	DR-2X2K-7-inver-RGB	Color	61
2	DR-2X4K-7-inver-RGB	Color	61
3	DR-2X8K-7-RGB	Color	61

Area Sensor Spectral Characteristics Chart


IMX287

1/2.9" CMOS 0.4M Monochrome

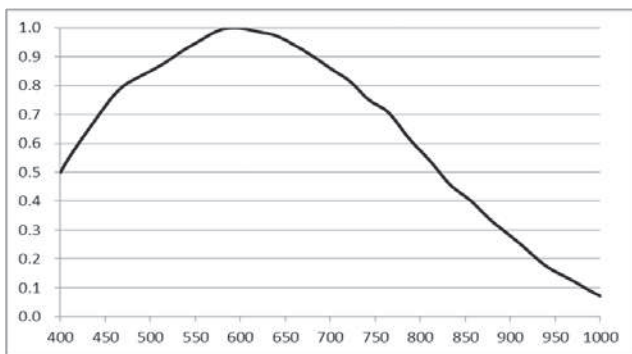


IMX287

1/2.9" CMOS 0.4M Color

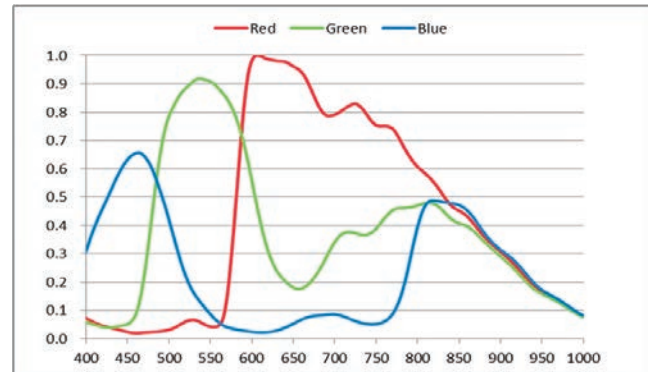


IMX433

1/1.7" CMOS 0.5M Monochrome

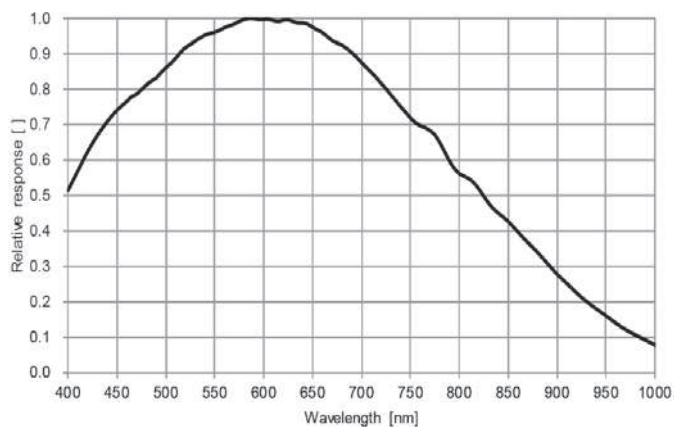


IMX433

1/1.7" CMOS 0.5M Color

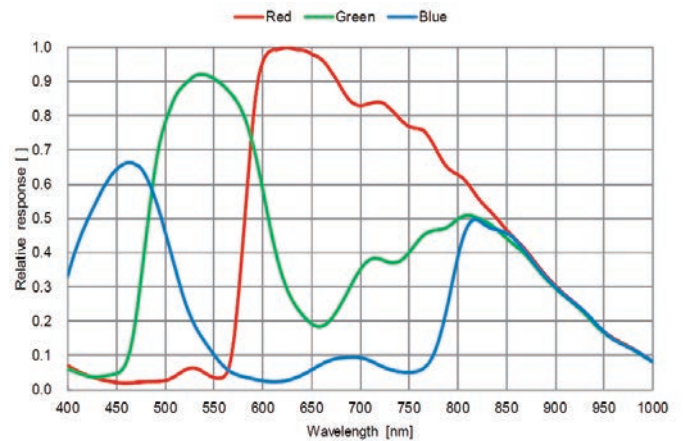


IMX273

1/2.9" CMOS 1.6M Monochrome

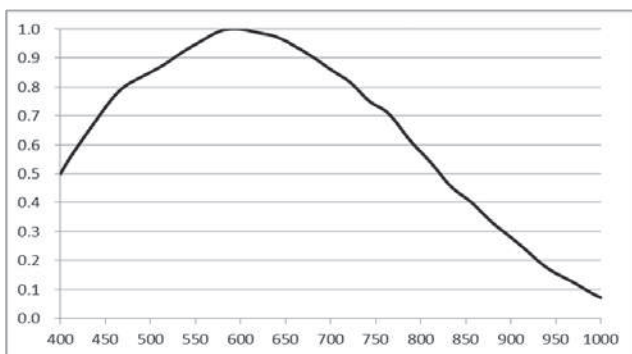


IMX273

1/2.9" CMOS 1.6M Color

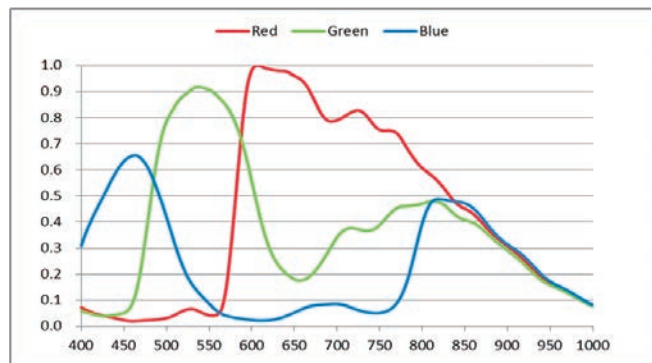


IMX174, IMX249

1/1.2" CMOS 2.3M Monochrome

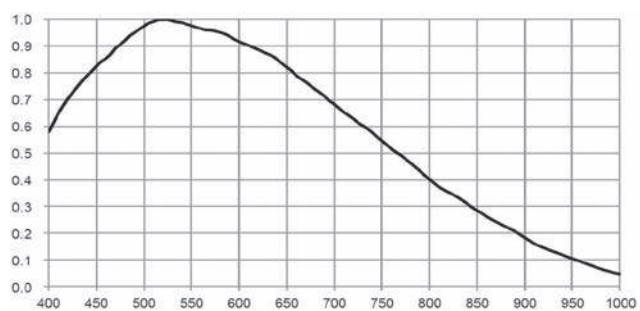


IMX174, IMX249

1/1.2" CMOS 2.3M Color

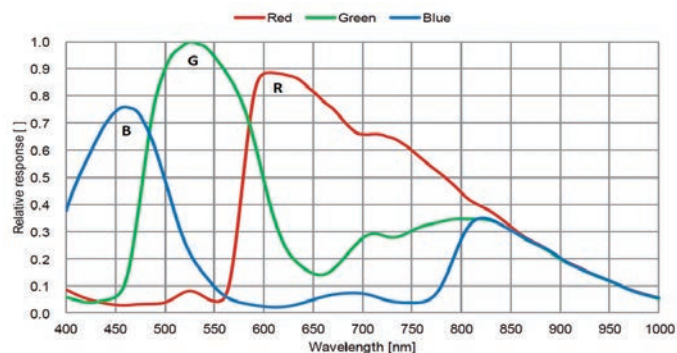


IMX430

1/1.7" CMOS 2M Monochrome

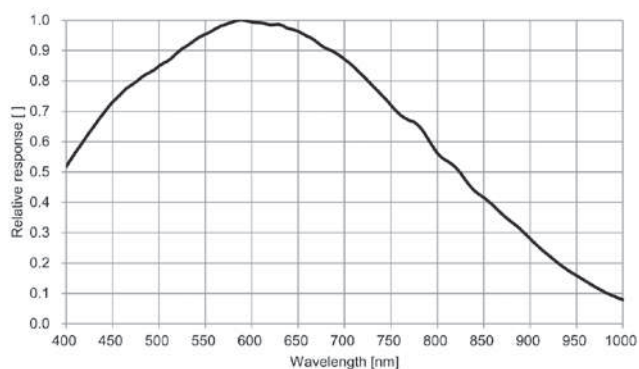


IMX430

1/1.7" CMOS 2M Color

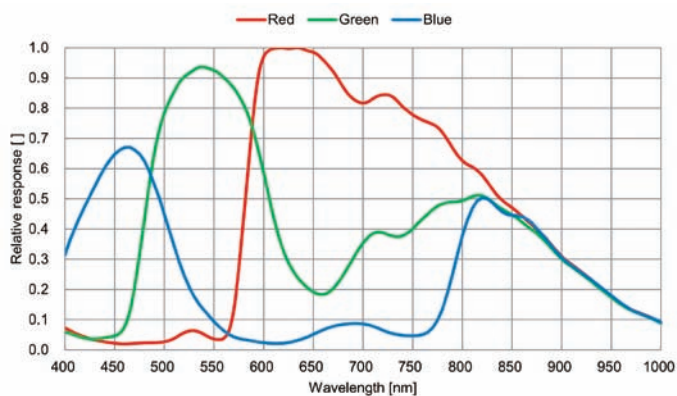


IMX265, IMX252

1/1.8" CMOS 3.2M Monochrome

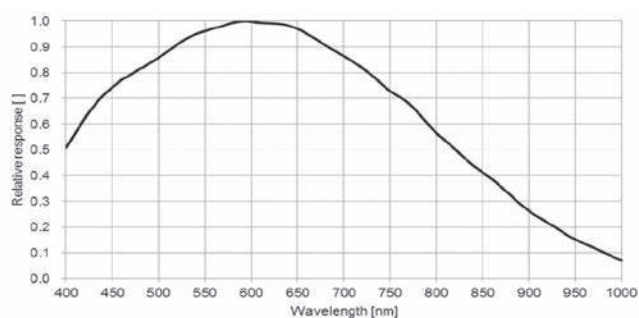


IMX265, IMX252

1/1.8" CMOS 3.2M Color

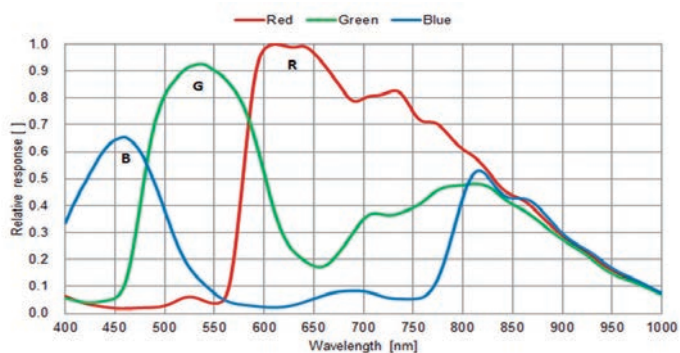


IMX264, IMX250

2/3" CMOS 5M Monochrome

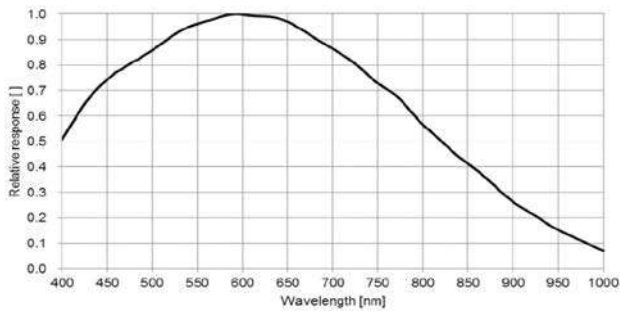


IMX264, IMX250

2/3" CMOS 5M Color

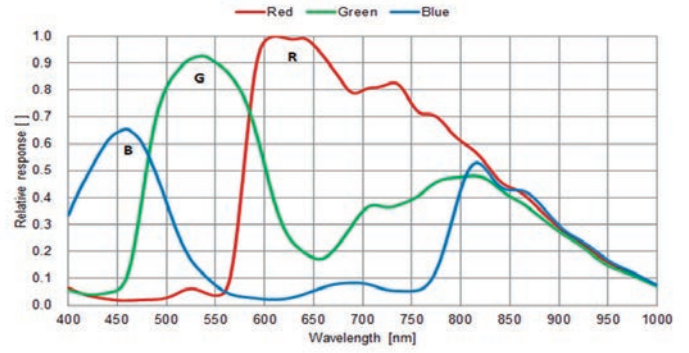


IMX267/IMX255

1" CMOS 8.9M Monochrome

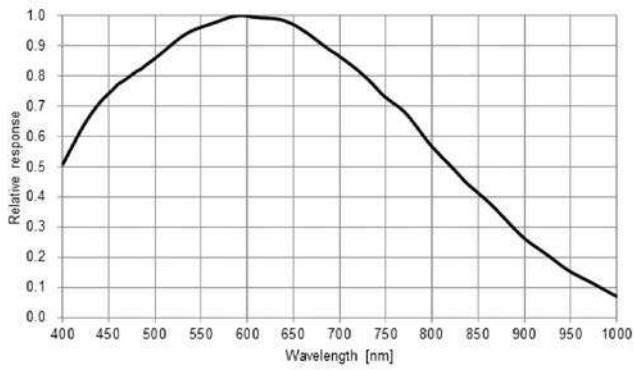


IMX267/IMX255

1" CMOS 8.9M Color

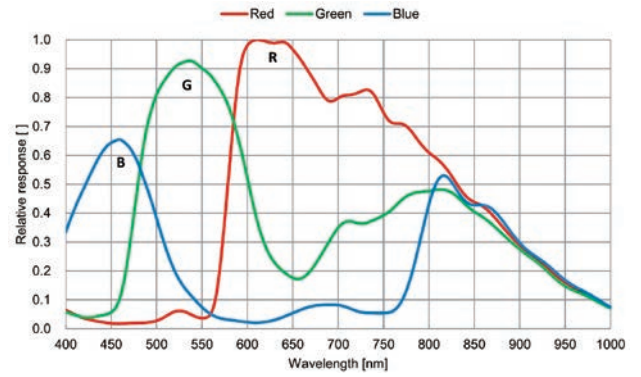


IMX304/IMX253

1.1" CMOS 12M Monochrome

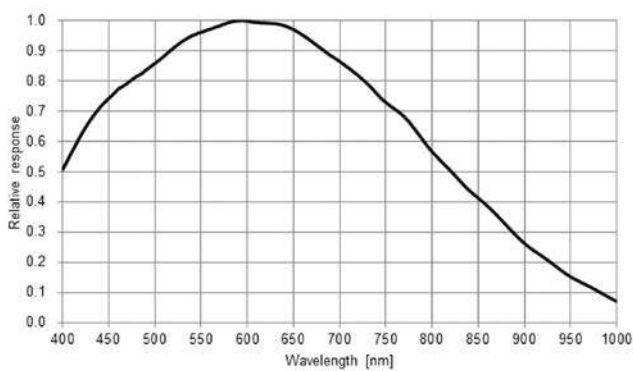


IMX304/IMX253

1.1" CMOS 12M Color

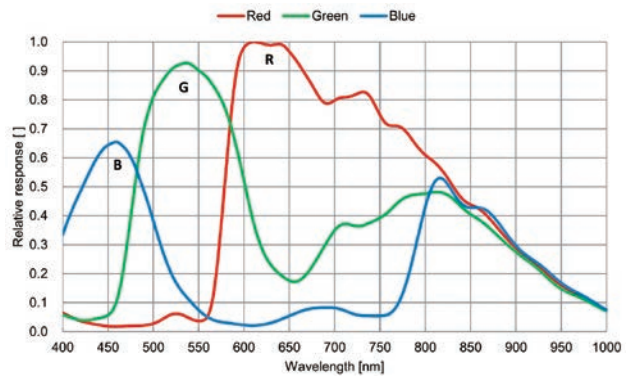


IMX382-0ABR-C

1/3.2" CMOS 1.3M Monochrome

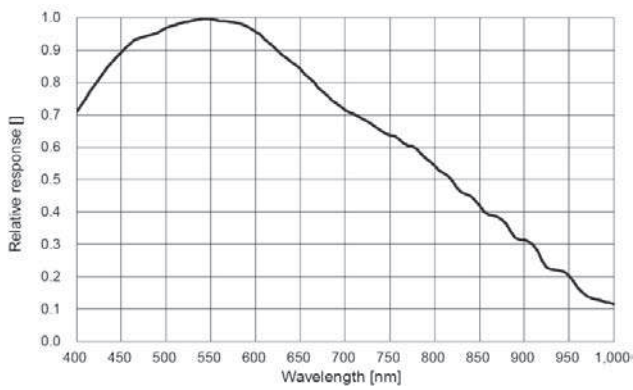


IMX382-0AQR-C

1/3.2" CMOS 1.3M Color

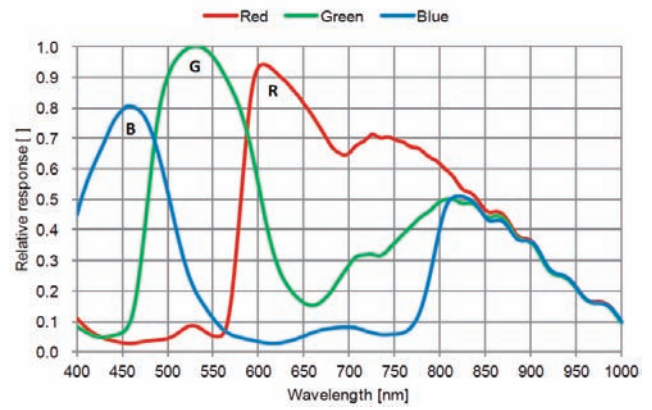


IMX178

1/1.8" CMOS 6.4M Monochrome

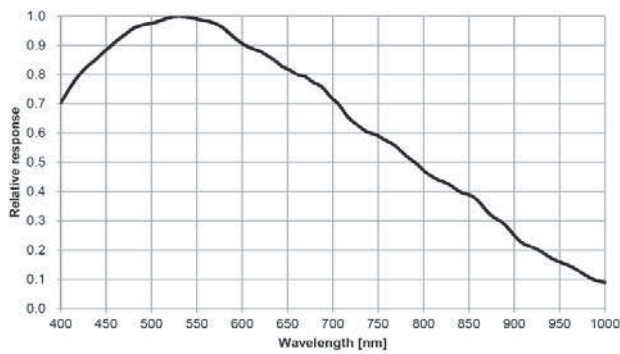


IMX178

1/1.8" CMOS 6.4M Color

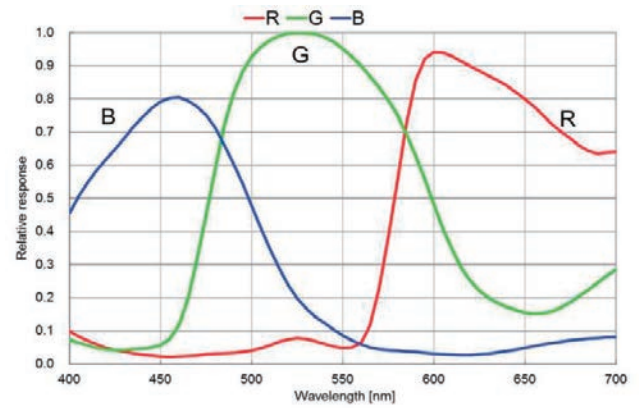


IMX428

1.1" CMOS 7.1M Monochrome

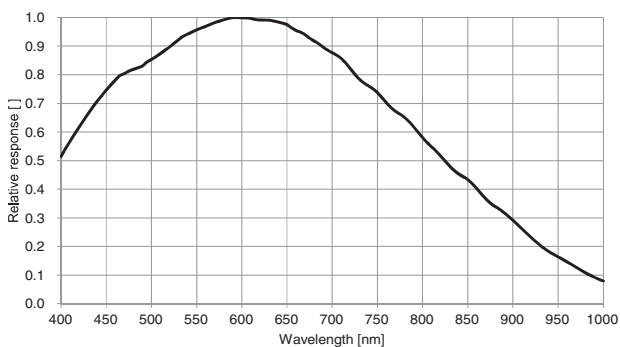


IMX274

1/2.5" CMOS 8.3M Color

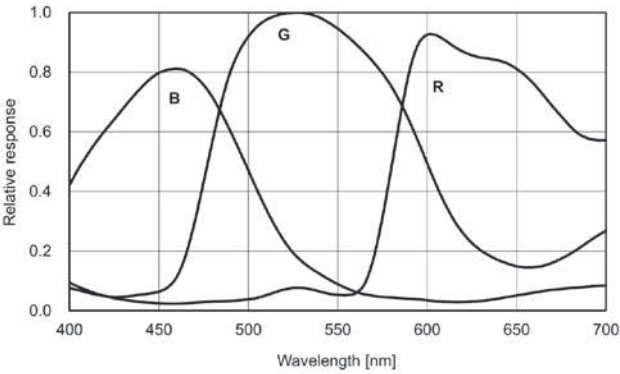


IMX226

1/1.7" CMOS 12M Monochrome

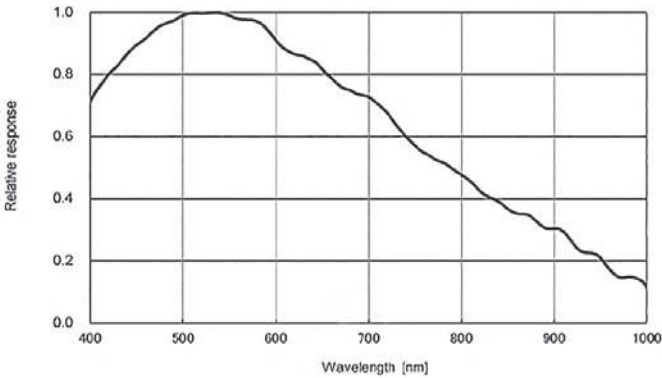


IMX226

1/1.7" CMOS 12M Color

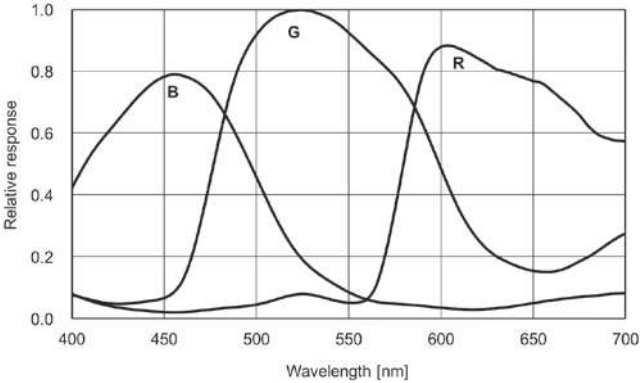


IMX183

1" CMOS 20M Monochrome

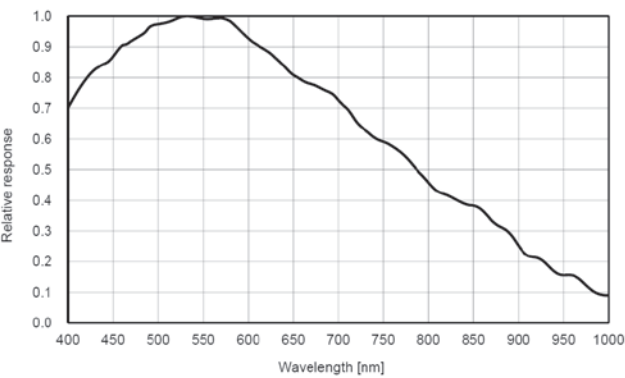


IMX183

1" CMOS 20M Color

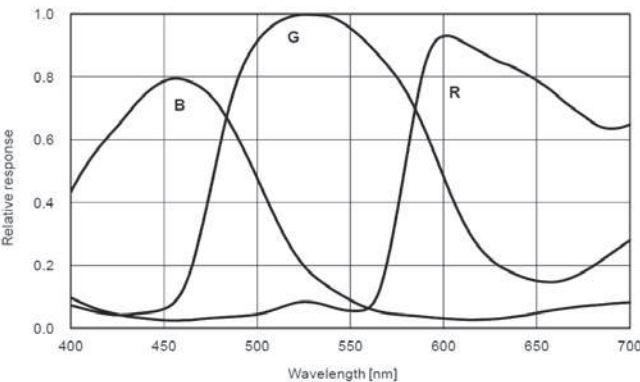


ISX017

1/3.2" CMOS 0.6M Color

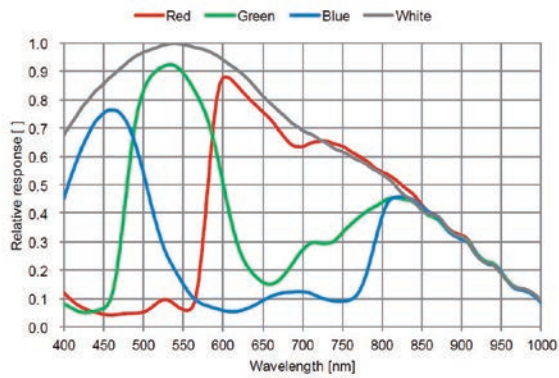

IMX136


1/2.8" CMOS 1080P FULL High-definition Color

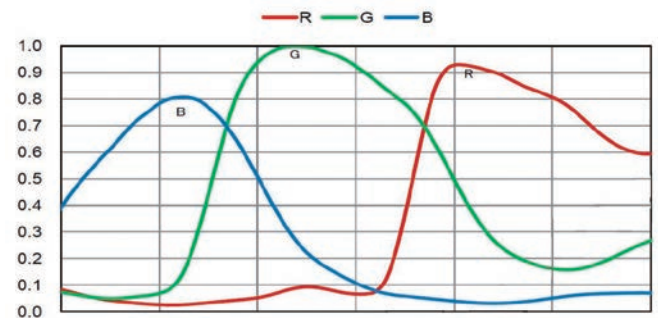

CMV300


CMV300

1/3" CMOS VGA Monochrome, Color

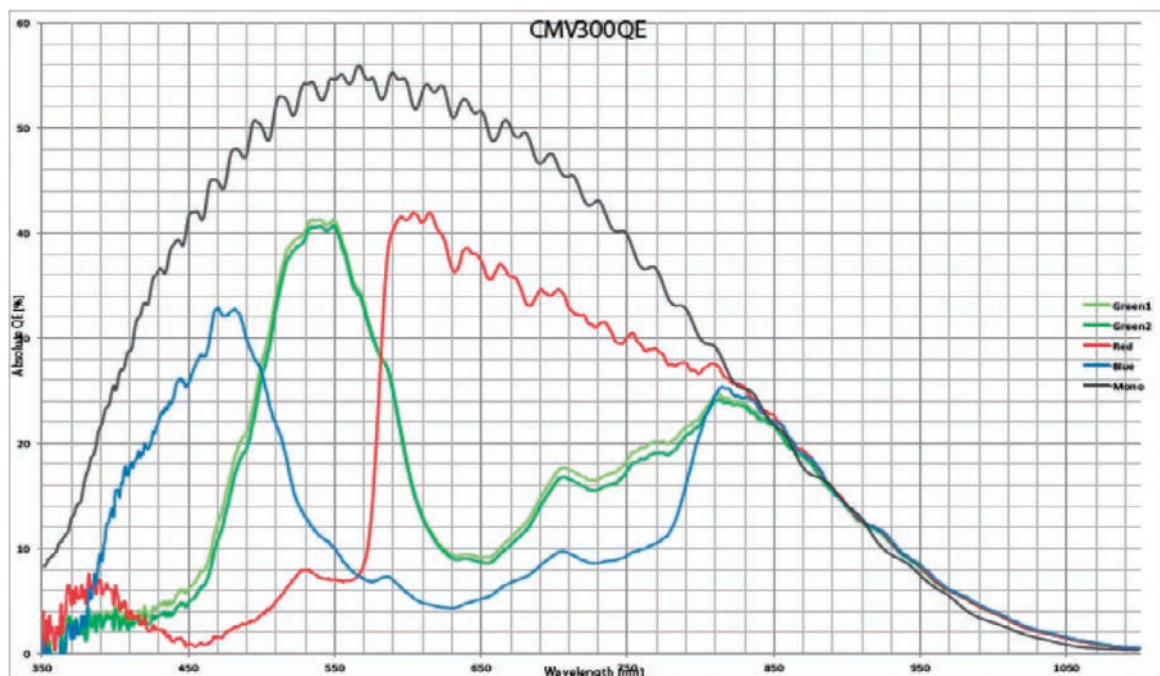


CMV2000/CMV4000

2/3" CMOS 2M Monochrome / 1" CMOS 4M Monochrome

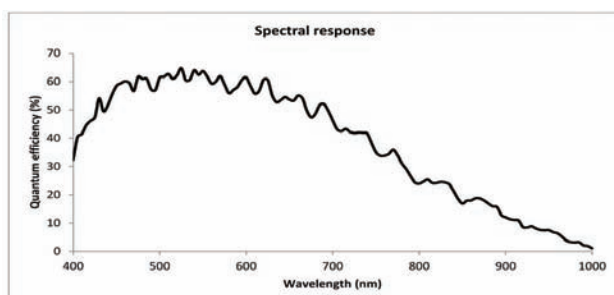


CMV2000/CMV4000

2/3" CMOS 2M Color / 1" CMOS 4M Color

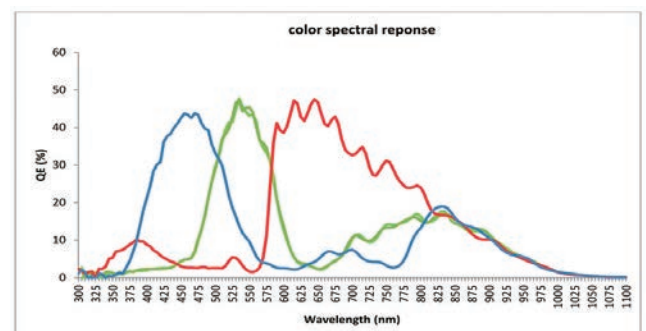

CMV2000/CMV4000


2/3" CMOS 2M NIR / 1" CMOS 4M NIR

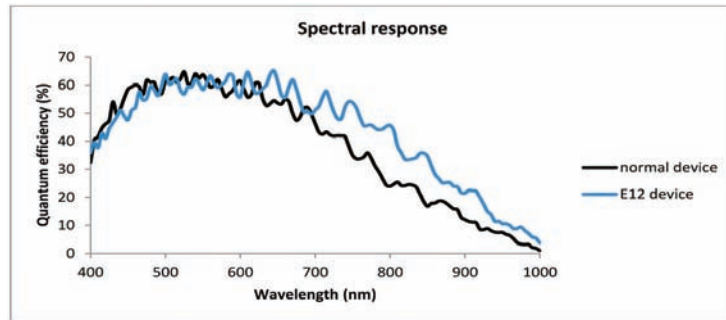

CMV12000


CMV12000

1.76" CMOS 12M Monochrome, Color

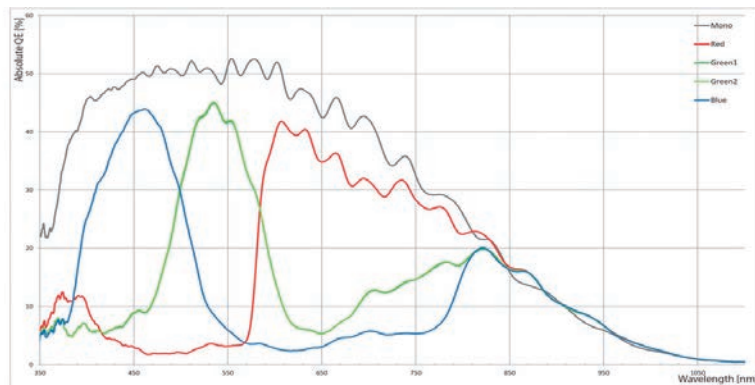

PYTHON 25K


APS-H CMOS 25M, Monochrome

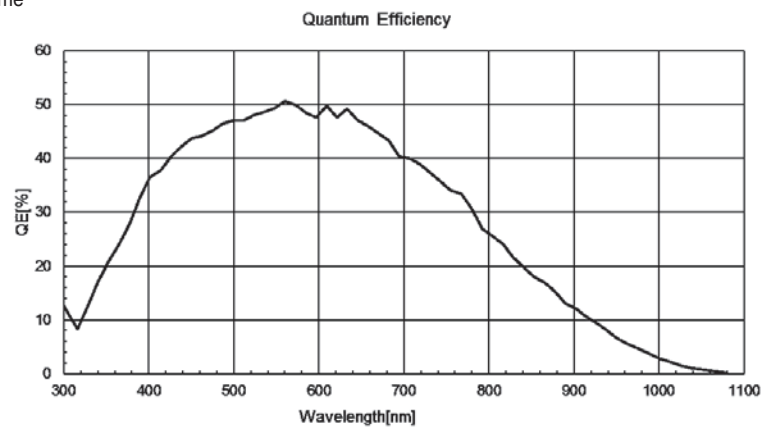

EV76C560ACT


EV76C560ACT

1/1.8" CMOS 1.3M Monochrome, Color

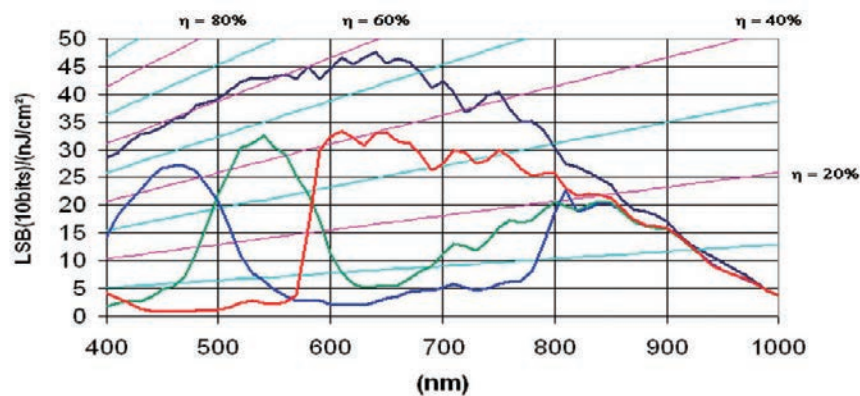


MT9P031

1/2.5" CMOS 5M Monochrome

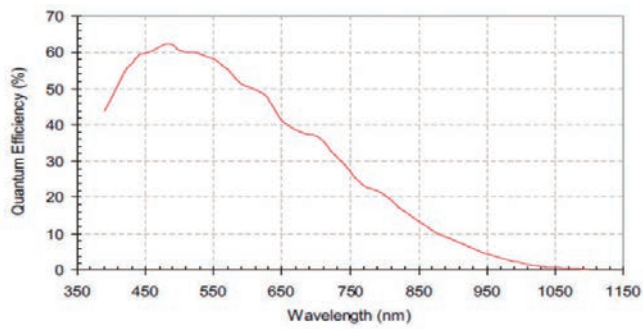


MT9P031

1/2.5" CMOS 5M Color

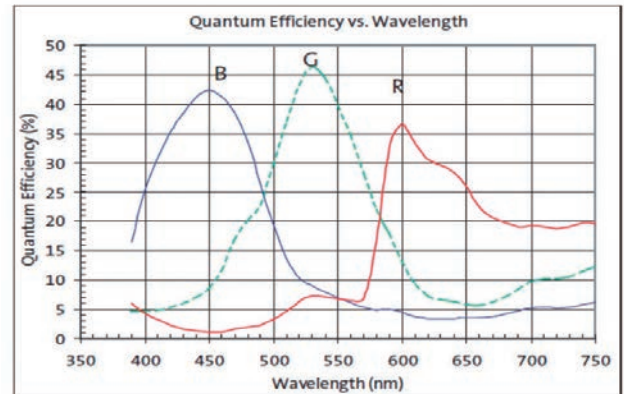


MT9J003

1/2.3" CMOS 10M Monochrome

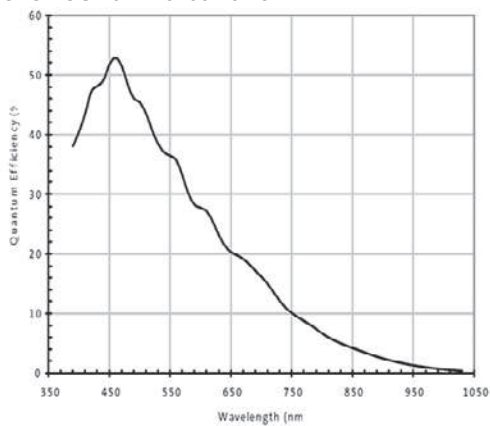

RJ33B4AA0DT


1/3" CCD VGA Monochrome

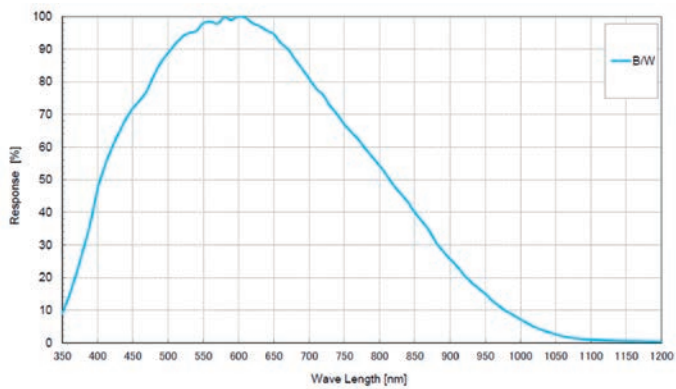

Line Scan Camera Spectral Characteristics Chart


DR-2K-7, DR-4K-7, DR-4K-3.5

2K7 μm Single
4K7 μm Single
4K3.5 μm Single

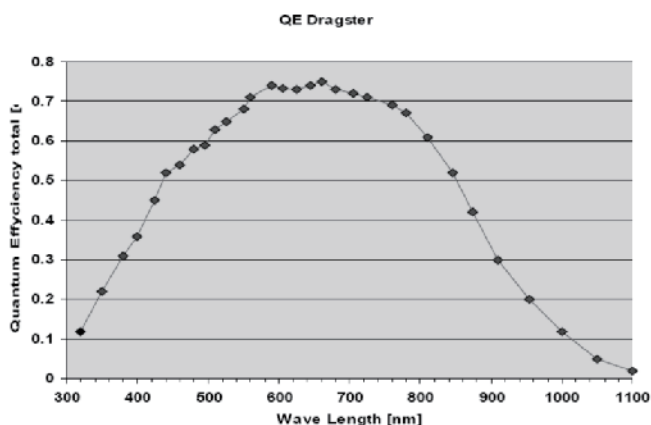


DR-8K-7, DR-8K-3.5, DR-16K-3.5

8K7 μm Single
8K3.5 μm Single
16K3.5 μm Single

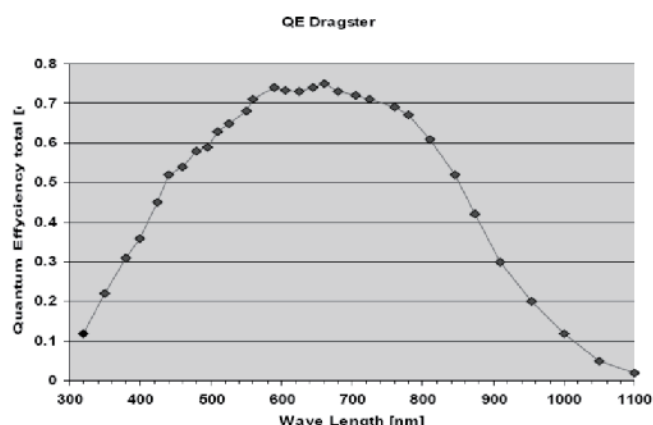


DR-2X2K-7-inver, DR-2X4K-7-inver, DR-2X8K-7

2K7 μm Dual
4K7 μm Dual
8K7 μm Dual

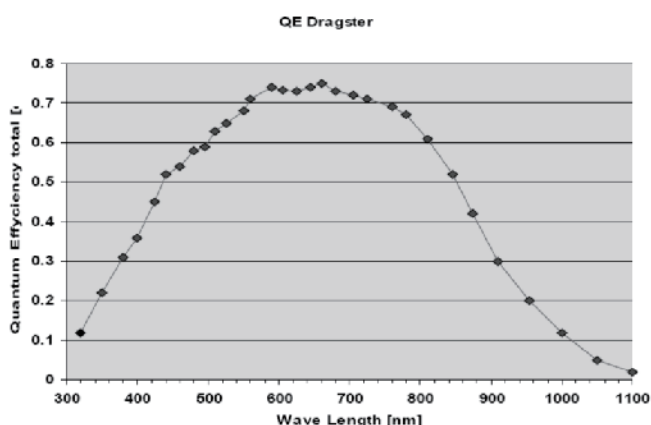

DR-2X2K-7-inver-RGB, DR-2X4K-7-inver-RGB, DR-2X8K-7-RGB

2K7 μm Dual
4K7 μm Dual
8K7 μm Dual

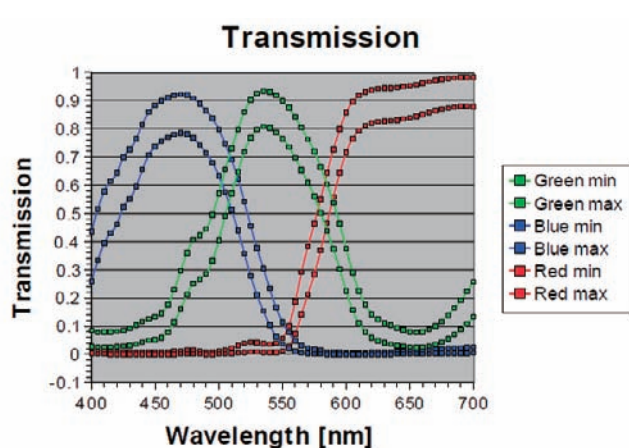

Trademarks

- * Camera Link, GigE Vision, USB3Vision, and PoCL are trademarks of AIA (Automated Imaging Association).
- * CoaXPress is a trademark of JIIA (Japan Industrial Imaging Association).
- * Opt-C:Link is a registered trademark of AVAL DATA CORPORATION.
- * Windows and Microsoft Visual Studio are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- * The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.
- * Other company names and product names in this document are the trademarks or registered trademarks of their respective companies.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: Do not use this document to operate the Unit.

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2017-2020 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_4_1

Cat. No. Q259-E1-05

0720(1117)